


MASONRY

Tradesman quality ideal for use in natural and artificial stone, masonry, brickwork and concrete.

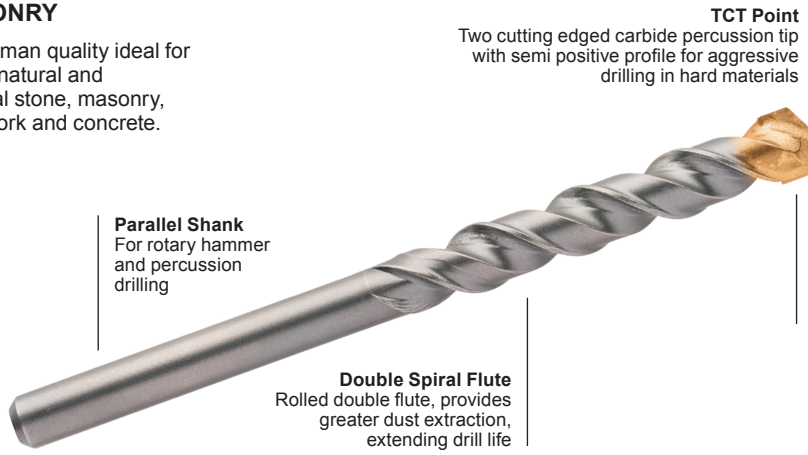

Parallel Shank
For rotary hammer and percussion drilling

Double Spiral Flute
Rolled double flute, provides greater dust extraction, extending drill life

TCT Point
Two cutting edged carbide percussion tip with semi positive profile for aggressive drilling in hard materials

Brazed Tip
Unique brazing process ensures a perfect bond between tip and body

suttontools



| Diameter mm | O/A Length | Shank mm | Plug Colour | Item # |
|------------------------|------------|----------|-------------|-----------|
| Standard Fixing | | | | |
| 3.0 | 60 | | Yellow | D600 0300 |
| 4.0 | 75 | | | D600 0400 |
| 5.0 | 85 | | White | D600 0500 |
| 5.5 | 95 | | Red | D600 0550 |
| 6.0 | 100 | | | D600 0600 |
| 6.5 | 100 | | Green | D600 0650 |
| 7.0 | 100 | | | D600 0700 |
| 8.0 | 120 | | Blue | D600 0800 |
| 9.0 | 120 | | | D600 0900 |
| 10.0 | 120 | | Orange | D600 1000 |
| 12.0 | 120 | 10 | | D600 1200 |
| 13.0 | 120 | 10 | | D600 1300 |
| Single Brick | | | | |
| 5.0 | 150 | | White | D601 0500 |
| 5.5 | 150 | | Red | D601 0550 |
| 6.0 | 150 | | | D601 0600 |
| 6.5 | 150 | | Green | D601 0650 |
| 7.0 | 150 | | | D601 0700 |
| 8.0 | 150 | | Blue | D601 0800 |
| 10.0 | 150 | | Orange | D601 1000 |
| 11.0 | 150 | 10 | Grey | D601 1100 |
| 12.0 | 150 | 10 | | D601 1200 |
| 13.0 | 150 | 10 | | D601 1300 |
| 14.0 | 150 | 10 | | D601 1400 |
| 16.0 | 150 | 12.7 | Black | D601 1600 |
| 20.0 | 160 | 12.7 | | D601 2000 |
| 22.0 | 160 | 12.7 | | D601 2200 |
| 25.0 | 160 | 12.7 | | D601 2500 |

| Diameter mm | O/A Length | Shank mm | Plug Colour | Item # |
|---------------------|------------|----------|-------------|-----------|
| Double Brick | | | | |
| 6.5 | 400 | | | D602 0650 |
| 8.0 | 400 | | | D602 0800 |
| 10.0 | 400 | | | D602 1000 |
| 13.0 | 400 | 10 | | D602 1300 |
| 16.0 | 400 | 12.7 | | D602 1600 |
| 20.0 | 400 | 12.7 | | D602 2000 |
| 22.0 | 400 | 12.7 | | D602 2200 |
| 25.0 | 400 | 12.7 | | D602 2500 |



D600 SMD2



D600 0009

| Sets | Contents | Pieces | Item # |
|-------------|---------------------------------------------------------------------------------------------------|--------|-----------|
| Masonry | (SF): 4.0, 5.0, 5.5, 6.5, 8.0, 10.0mm | 6 | D600 SMD2 |
| Combination | D600 Masonry Drill Bits: 5.5, 6.0, 6.5, 8.0mm D105 Viper Drill Bits: 1.5, 2.0, 3.0, 4.0, 5.0mm | 9 | D600 0009 |

(SF) – Standard Fixing (SB) – Single Brick (DB) – Double Brick

BULK PACK

| Diameter mm | O/A Length | Plug Colour | Pieces | Item # |
|------------------------|----------------------------|-------------|--------|-----------|
| Standard Fixing | | | | |
| 5.0 | 85 | White | 5 | D650 0500 |
| 6.0 | 100 | | 5 | D650 0600 |
| 6.5 | 100 | Green | 5 | D650 0650 |
| 8.0 | 120 | Blue | 5 | D650 0800 |
| 10.0 | 120 | Orange | 5 | D650 1000 |
| Set | 5.0, 6.0, 6.5, 8.0, 10.0mm | | 5 | D650 0005 |

BULK PACK

| Diameter mm | O/A Length | Plug Colour | Pieces | Item # |
|---------------------|----------------------------|-------------|--------|-----------|
| Single Brick | | | | |
| 5.0 | 150 | White | 5 | D651 0500 |
| 6.0 | 150 | | 5 | D651 0600 |
| 6.5 | 150 | Green | 5 | D651 0650 |
| 8.0 | 150 | Blue | 5 | D651 0800 |
| 10.0 | 150 | Orange | 5 | D651 1000 |
| Set | 5.0, 6.0, 6.5, 8.0, 10.0mm | | 5 | D651 0005 |

MASONRY DRILL BITS – SDS PLUS 2 CUT

MILWAUKEE® SDS Plus 2-Cut drill bits have Breaker Points. 3 offset aggressive power breakers. These produce a “Demolition” effect and create micro cracks in the drilled material. Up to 25% FASTER. Centering tip ensures immediate spot drilling with pin point accuracy. This prevents skidding on smooth surfaces. Enlarged rebar chamfers prevents side tip damage when hitting rebar, this reduces the risk of the drill bit jamming when hitting rebar. Tapered shoulder design provides a thinner shoulder towards drill tip for less friction providing for greater speed. This is Ideal for cordless hammers identified from its tapered shoulder geometry. Reinforced flute has high volume flute geometry for optimum dust removal. Reinforced flute design (thicker core) gives full power transfer to the tip, this lowers vibrations and gives exceptional break resistance with less breakages and best durability.



| Product Code | Description |
|--------------|---------------------------------|
| 4932339498 | SDS PLUS 2 CUT 4 x 110mm |
| 4932399143 | SDS PLUS 2 CUT 4 x 160mm |
| 4932307067 | SDS PLUS 2 CUT 5 x 110mm |
| 4932371702 | SDS PLUS 2 CUT 5 x 110mm (10) |
| 4932399315 | SDS PLUS 2 CUT 5 x 160mm |
| 4932352520 | SDS PLUS 2 CUT 5 x 160mm (10) |
| 4932399316 | SDS PLUS 2 CUT 5 x 210mm |
| 4932339499 | SDS PLUS 2 CUT 5.5 x 110mm |
| 4932352521 | SDS PLUS 2 CUT 5.5 x 110mm (10) |
| 4932340408 | SDS PLUS 2 CUT 5.5 x 160mm |
| 4932371703 | SDS PLUS 2 CUT 5.5 x 160mm (10) |
| 4932399317 | SDS PLUS 2 CUT 5.5 x 210mm |
| 4932399318 | SDS PLUS 2 CUT 5.5 x 260mm |
| 4932399319 | SDS PLUS 2 CUT 5.5 x 310mm |
| 4932399320 | SDS PLUS 2 CUT 5.5 x 410mm |
| 4932307068 | SDS PLUS 2 CUT 6 x 110mm |
| 4932371704 | SDS PLUS 2 CUT 6 x 110mm (10) |
| 4932307069 | SDS PLUS 2 CUT 6 x 160mm |
| 4932371705 | SDS PLUS 2 CUT 6 x 160mm (10) |
| 4932373136 | SDS PLUS 2 CUT 6 x 210mm |
| 4932353819 | SDS PLUS 2 CUT 6 x 260mm |
| 4932399321 | SDS PLUS 2 CUT 6 x 310mm |
| 4932399322 | SDS PLUS 2 CUT 6 x 460mm |
| 4932344292 | SDS PLUS 2 CUT 6.5 x 110mm |
| 4932344293 | SDS PLUS 2 CUT 6.5 x 160mm |
| 4932399338 | SDS PLUS 2 CUT 6.5 x 160mm (10) |
| 4932399147 | SDS PLUS 2 CUT 6.5 x 210mm |
| 4932399148 | SDS PLUS 2 CUT 6.5 x 260mm |
| 4932399323 | SDS PLUS 2 CUT 6.5 x 310mm |
| 4932353820 | SDS PLUS 2 CUT 7 x 110mm |
| 4932340409 | SDS PLUS 2 CUT 7 x 160mm |
| 4932399222 | SDS PLUS 2 CUT 7 x 210mm |
| 4932399324 | SDS PLUS 2 CUT 7 x 250mm |
| 4932307070 | SDS PLUS 2 CUT 8 x 110mm |
| 4932307071 | SDS PLUS 2 CUT 8 x 160mm |
| 4932371706 | SDS PLUS 2 CUT 8 x 160mm (10) |
| 4932307072 | SDS PLUS 2 CUT 8 x 210mm |
| 4932353821 | SDS PLUS 2 CUT 8 x 260mm |
| 4932399326 | SDS PLUS 2 CUT 8 x 400mm |
| 4932367013 | SDS PLUS 2 CUT 8 x 460mm |
| 4932399327 | SDS PLUS 2 CUT 8 x 600mm |
| 4932399328 | SDS PLUS 2 CUT 8 x 1000mm |
| 4932353823 | SDS PLUS 2 CUT 9 x 160mm |
| 4932353822 | SDS PLUS 2 CUT 9 x 210mm |
| 4932340410 | SDS PLUS 2 CUT 10 x 110mm |
| 4932307073 | SDS PLUS 2 CUT 10 x 160mm |
| 4932371708 | SDS PLUS 2 CUT 10 x 160mm (10) |
| 4932307074 | SDS PLUS 2 CUT 10 x 210mm |
| 4932371709 | SDS PLUS 2 CUT 10 x 210mm (10) |
| 4932344295 | SDS PLUS 2 CUT 10 x 260mm |
| 4932353824 | SDS PLUS 2 CUT 10 x 310mm |
| 4932344296 | SDS PLUS 2 CUT 10 x 450mm |
| 4932367014 | SDS PLUS 2 CUT 10 x 600mm |
| 4932367015 | SDS PLUS 2 CUT 10 x 1000mm |
| 4932367066 | SDS PLUS 2 CUT 11 x 160mm |

| Product Code | Description |
|--------------|--------------------------------|
| 4932399329 | SDS PLUS 2 CUT 11 x 260mm |
| 4932307075 | SDS PLUS 2 CUT 12 x 160mm |
| 4932399343 | SDS PLUS 2 CUT 12 x 160mm (10) |
| 4932307076 | SDS PLUS 2 CUT 12 x 210mm |
| 4932371710 | SDS PLUS 2 CUT 12 x 210mm (10) |
| 4932344297 | SDS PLUS 2 CUT 12 x 260mm |
| 4932307077 | SDS PLUS 2 CUT 12 x 450mm |
| 4932367068 | SDS PLUS 2 CUT 12 x 600mm |
| 4932367017 | SDS PLUS 2 CUT 12 x 1000mm |
| 4932307946 | SDS PLUS 2 CUT 13 x 160mm |
| 4932344298 | SDS PLUS 2 CUT 13 x 260mm |
| 4932307078 | SDS PLUS 2 CUT 14 x 160mm |
| 4932353826 | SDS PLUS 2 CUT 14 x 210mm |
| 4932307079 | SDS PLUS 2 CUT 14 x 260mm |
| 4932399330 | SDS PLUS 2 CUT 14 x 310mm |
| 4932307088 | SDS PLUS 2 CUT 14 x 450mm |
| 4932367018 | SDS PLUS 2 CUT 14 x 600mm |
| 4932367019 | SDS PLUS 2 CUT 14 x 1000mm |
| 4932373910 | SDS PLUS 2 CUT 15 x 160mm |
| 4932344300 | SDS PLUS 2 CUT 15 x 260mm |
| 4932395450 | SDS PLUS 2 CUT 15 x 450mm |
| 4932307080 | SDS PLUS 2 CUT 16 x 160mm |
| 4932307081 | SDS PLUS 2 CUT 16 x 210mm |
| 4932399331 | SDS PLUS 2 CUT 16 x 260mm |
| 4932344301 | SDS PLUS 2 CUT 16 x 310mm |
| 4932307082 | SDS PLUS 2 CUT 16 x 450mm |
| 4932367069 | SDS PLUS 2 CUT 16 x 600mm |
| 4932367020 | SDS PLUS 2 CUT 16 x 800mm |
| 4932367021 | SDS PLUS 2 CUT 16 x 1000mm |
| 4932397210 | SDS PLUS 2 CUT 17 x 210mm |
| 4932344303 | SDS PLUS 2 CUT 18 x 200mm |
| 4932307083 | SDS PLUS 2 CUT 18 x 250mm |
| 4932344304 | SDS PLUS 2 CUT 18 x 300mm |
| 4932340411 | SDS PLUS 2 CUT 18 x 450mm |
| 4932367022 | SDS PLUS 2 CUT 18 x 600mm |
| 4932367024 | SDS PLUS 2 CUT 18 x 1000mm |
| 4932367070 | SDS PLUS 2 CUT 19 x 200mm |
| 4932367071 | SDS PLUS 2 CUT 19 x 450mm |
| 4932344305 | SDS PLUS 2 CUT 20 x 200mm |
| 4932307084 | SDS PLUS 2 CUT 20 x 250mm |
| 4932399027 | SDS PLUS 2 CUT 20 x 300mm |
| 4932307085 | SDS PLUS 2 CUT 20 x 450mm |
| 4932367025 | SDS PLUS 2 CUT 20 x 600mm |
| 4932367026 | SDS PLUS 2 CUT 20 x 1000mm |
| 4932373911 | SDS PLUS 2 CUT 22 x 250mm |
| 4932344307 | SDS PLUS 2 CUT 22 x 450mm |
| 4932367027 | SDS PLUS 2 CUT 22 x 600mm |
| 4932367029 | SDS PLUS 2 CUT 22 x 1000mm |
| 4932373922 | SDS PLUS 2 CUT 24 x 250mm |
| 4932307087 | SDS PLUS 2 CUT 24 x 450mm |
| 4932344308 | SDS PLUS 2 CUT 25 x 250mm |
| 4932344309 | SDS PLUS 2 CUT 25 x 450mm |
| 4932367030 | SDS PLUS 2 CUT 25 x 1000mm |
| 4932344310 | SDS PLUS 2 CUT 26 x 250mm |
| 4932344311 | SDS PLUS 2 CUT 26 x 450mm |

SDS-PLUS® 2 CUTTER



SDS PLUS KITS



- **4 FLUTE HELIX:** The 4 flute spiral incorporates a maximised central core for increased durability and energy transmission.
- **CORE REINFORCED:** Hardened steel body for extra strength and reduced breakage.
- **CARBIDE TIP:** The solid two cutter head is flanked by two individual cutting tips delivering a fast and efficient drilling speed. These carbide tips and body are brazed together to create a strong and durable bond.



| Cat. No. | Ø mm | Total length mm | Working length mm | Cutters |
|-----------|------|-----------------|-------------------|---------|
| DT9503-QZ | 4 | 160 | 100 | 2 |
| DT9504-QZ | 5 | 110 | 50 | 2 |
| DT9505-QZ | 5 | 160 | 100 | 2 |
| DT9506-QZ | 5 | 210 | 150 | 2 |
| DT9508-QZ | 5.5 | 110 | 50 | 2 |
| DT9509-QZ | 5.5 | 160 | 100 | 2 |
| DT9510-QZ | 5.5 | 210 | 150 | 2 |
| DT9514-QZ | 6 | 110 | 50 | 2 |
| DT9515-QZ | 6 | 160 | 100 | 2 |
| DT9516-QZ | 6 | 210 | 150 | 2 |
| DT9519-QZ | 6.5 | 110 | 50 | 2 |
| DT9520-QZ | 6.5 | 160 | 100 | 2 |
| DT9521-QZ | 6.5 | 210 | 150 | 2 |
| DT9523-QZ | 6.5 | 310 | 250 | 2 |
| DT9524-QZ | 7 | 110 | 50 | 2 |
| DT9525-QZ | 7 | 160 | 100 | 2 |
| DT9528-QZ | 8 | 110 | 50 | 2 |
| DT9529-QZ | 8 | 160 | 100 | 2 |
| DT9530-QZ | 8 | 210 | 150 | 2 |
| DT9531-QZ | 8 | 260 | 200 | 2 |
| DT9539-QZ | 10 | 110 | 50 | 2 |
| DT9540-QZ | 10 | 160 | 100 | 2 |
| DT9541-QZ | 10 | 210 | 150 | 2 |
| DT9542-QZ | 10 | 260 | 200 | 2 |
| DT9543-QZ | 10 | 310 | 250 | 2 |
| DT9545-QZ | 10 | 460 | 400 | 2 |
| DT9552-QZ | 12 | 160 | 100 | 2 |
| DT9553-QZ | 12 | 200 | 150 | 2 |
| DT9554-QZ | 12 | 260 | 200 | 2 |
| DT9555-QZ | 12 | 300 | 250 | 2 |
| DT9557-QZ | 12 | 450 | 400 | 2 |
| DT9560-QZ | 13 | 160 | 100 | 2 |
| DT9566-QZ | 14 | 160 | 100 | 2 |
| DT9567-QZ | 14 | 200 | 150 | 2 |
| DT9568-QZ | 14 | 260 | 200 | 2 |
| DT9570-QZ | 14 | 450 | 400 | 2 |
| DT9573-QZ | 15 | 160 | 100 | 2 |
| DT9575-QZ | 15 | 260 | 200 | 2 |
| DT9578-QZ | 16 | 260 | 100 | 2 |
| DT9579-QZ | 16 | 200 | 150 | 2 |
| DT9581-QZ | 16 | 300 | 250 | 2 |
| DT9582-QZ | 16 | 450 | 400 | 2 |
| DT9583-QZ | 16 | 600 | 550 | 2 |
| DT9585-QZ | 16 | 1000 | 950 | 2 |
| DT9587-QZ | 18 | 200 | 150 | 2 |
| DT9589-QZ | 18 | 300 | 250 | 2 |

| Product Code | Description |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4932352340 | SDS PLUS 2 CUT 10 Piece Kit 1 x SDS PLUS 2 CUT 5 x 110mm 2 x SDS PLUS 2 CUT 6 x 110mm 2 x SDS PLUS 2 CUT 6 x 160mm 2 x SDS PLUS 2 CUT 8 x 160mm 1 x SDS PLUS 2 CUT 10 x 160mm 1 x SDS PLUS 2 CUT 12 x 160mm 1 x SDS PLUS 2 CUT 14 x 160mm |
| 4932352342 | SDS PLUS 2 CUT 10 Piece Kit (Counter Display 10 units) |

DUST EXTRACTION




| Product Code | Description |
|--------------|---------------------------------------------------------|
| 48033035 | SDS Plus Dust Trap |
| 5317-DE | SDS Max Dust Extraction Attachment |
| 5318-DE | SDS Max Chisel Boot |
| 4932430467 | Dust Extraction Cutting Shroud 115-125mm |
| 4932459341 | Dust Extraction Cutting Shroud 180-230mm |
| 49406100 | Universal Surface Grinding Dust Shroud 4-5" |
| 49406105 | Universal Surface Grinding Dust Shroud 7" |
| 49406190 | Dust Shroud Dual Swivel Adapter 450mm |
| 4932430005 | DEK26 Dual Port Dust Extraction Kit to suit M18SMS216-0 |
| 4932352304 | Filter Cartridge AS300ELCP |
| 4932352307 | FILTER BAG 30L 5X AS300ELCP |
| 4932352309 | AS300ELCP Replacement Filter Bags (5 x Disposable Bags) |
| 49901957 | Power Tool Adapter |
| 49901959 | Hose Clip Adapter |

MASONRY SDS PLUS – 2 CUT

Professional quality, 30% faster than conventional SDS drills. For concrete, brick, aerated concrete, stone and granite.



Patented Destructor Carbide Tip
Aggressive Z-shape self centring point with wavy cutting edges for superior destruction capacity




Check out the demo



Sand-blasted Finish
Environmentally friendly production method with zero heavy metals

SDS Plus Shank
Suits ALL SDS Plus rotary hammer drills

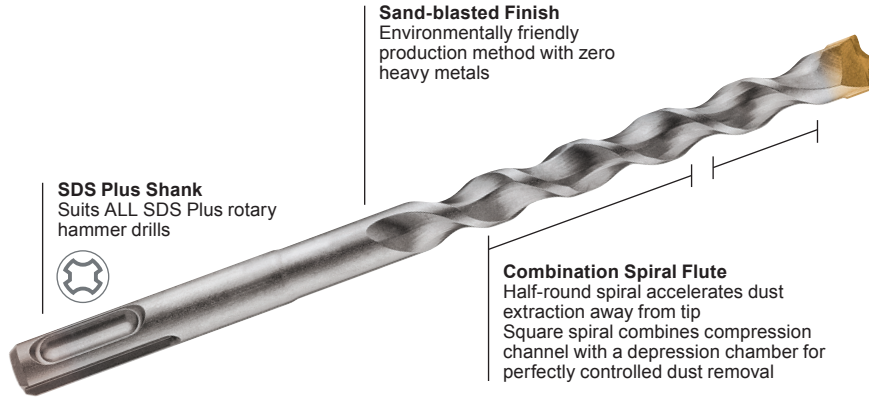

Combination Spiral Flute
Half-round spiral accelerates dust extraction away from tip
Square spiral combines compression channel with a depression chamber for perfectly controlled dust removal

| Diameter mm | O/A Length | Flute Length | Item # |
|-------------|------------|--------------|--------|
|-------------|------------|--------------|--------|

110mm overall length SDS Plus Shank

| | | | |
|------|-----|----|-----------|
| 5.0 | 110 | 50 | D612 0500 |
| 5.5 | 110 | 50 | D612 0550 |
| 6.0 | 110 | 50 | D612 0600 |
| 6.5 | 110 | 50 | D612 0650 |
| 7.0 | 110 | 50 | D612 0700 |
| 8.0 | 110 | 50 | D612 0800 |
| 10.0 | 110 | 50 | D612 1000 |

160mm overall length SDS Plus Shank

| | | | |
|------|-----|-----|-----------|
| 5.0 | 160 | 100 | D613 0500 |
| 5.5 | 160 | 100 | D613 0550 |
| 6.0 | 160 | 100 | D613 0600 |
| 6.5 | 160 | 100 | D613 0650 |
| 7.0 | 160 | 100 | D613 0700 |
| 8.0 | 160 | 100 | D613 0800 |
| 9.0 | 160 | 100 | D613 0900 |
| 10.0 | 160 | 100 | D613 1000 |
| 11.0 | 160 | 100 | D613 1100 |
| 12.0 | 160 | 100 | D613 1200 |
| 13.0 | 160 | 100 | D613 1300 |
| 14.0 | 160 | 100 | D613 1400 |
| 15.0 | 160 | 100 | D613 1500 |
| 16.0 | 160 | 100 | D613 1600 |

210mm overall length SDS Plus Shank

| | | | |
|------|-----|-----|-----------|
| 6.0 | 210 | 150 | D614 0600 |
| 6.5 | 210 | 150 | D614 0650 |
| 8.0 | 210 | 150 | D614 0800 |
| 10.0 | 210 | 150 | D614 1000 |
| 12.0 | 210 | 150 | D614 1200 |
| 13.0 | 210 | 150 | D614 1300 |
| 14.0 | 210 | 150 | D614 1400 |
| 16.0 | 210 | 150 | D614 1600 |
| 18.0 | 210 | 150 | D614 1800 |
| 20.0 | 210 | 150 | D614 2000 |
| 22.0 | 210 | 150 | D614 2200 |
| 24.0 | 210 | 150 | D614 2400 |
| 25.0 | 210 | 150 | D614 2500 |

260mm overall length SDS Plus Shank

| | | | |
|-----|-----|-----|-----------|
| 6.0 | 260 | 200 | D615 0600 |
| 6.5 | 260 | 200 | D615 0650 |
| 8.0 | 260 | 200 | D615 0800 |

| Diameter mm | O/A Length | Flute Length | Item # |
|-------------|------------|--------------|--------|
|-------------|------------|--------------|--------|

| | | | |
|------|-----|-----|-----------|
| 10.0 | 260 | 200 | D615 1000 |
| 12.0 | 260 | 200 | D615 1200 |
| 13.0 | 260 | 200 | D615 1300 |
| 14.0 | 260 | 200 | D615 1400 |
| 16.0 | 260 | 200 | D615 1600 |
| 18.0 | 260 | 200 | D615 1800 |
| 20.0 | 260 | 200 | D615 2000 |
| 22.0 | 260 | 200 | D615 2200 |
| 24.0 | 260 | 200 | D615 2400 |
| 25.0 | 260 | 200 | D615 2500 |

310mm overall length SDS Plus Shank

| | | | |
|------|-----|-----|-----------|
| 6.0 | 310 | 260 | D627 0600 |
| 8.0 | 310 | 260 | D627 0800 |
| 10.0 | 310 | 260 | D627 1000 |
| 12.0 | 310 | 260 | D627 1200 |
| 13.0 | 310 | 260 | D627 1300 |
| 14.0 | 310 | 260 | D627 1400 |
| 16.0 | 310 | 260 | D627 1600 |
| 18.0 | 310 | 260 | D627 1800 |
| 20.0 | 310 | 260 | D627 2000 |
| 22.0 | 310 | 260 | D627 2200 |
| 24.0 | 310 | 260 | D627 2400 |
| 25.0 | 310 | 260 | D627 2500 |

410mm overall length SDS Plus Shank

| | | | |
|------|-----|-----|-----------|
| 8.0 | 410 | 350 | D616 0800 |
| 10.0 | 410 | 350 | D616 1000 |
| 12.0 | 410 | 350 | D616 1200 |
| 13.0 | 410 | 350 | D616 1300 |
| 14.0 | 410 | 350 | D616 1400 |
| 16.0 | 410 | 350 | D616 1600 |
| 18.0 | 410 | 350 | D616 1800 |
| 20.0 | 410 | 350 | D616 2000 |
| 22.0 | 410 | 350 | D616 2200 |
| 24.0 | 410 | 350 | D616 2400 |
| 25.0 | 410 | 350 | D616 2500 |

Sets

| | | | |
|----------------------------------------------|-----|-----|-----------|
| 4 Pce: 6, 8, 10, 12mm | 160 | 100 | D613 0004 |
| 7 Pce: 5, 6, 8mm & 6, 8, 10, 12mm | 110 | 50 | D613 0007 |
| | 160 | 100 | |

| Diameter mm | O/A Length | Flute Length | Item # |
|-------------|------------|--------------|--------|
|-------------|------------|--------------|--------|

| | | | |
|----------------------------------------|-----|-----|-----------|
| 10 Pce Bulk Pack SDS Plus Shank | | | |
| 5.0 | 160 | 100 | D681 0500 |
| 5.5 | 160 | 100 | D681 0550 |
| 6.0 | 160 | 100 | D681 0600 |
| 6.5 | 160 | 100 | D681 0650 |
| 8.0 | 160 | 100 | D681 0800 |
| 10.0 | 160 | 100 | D681 1000 |
| 12.0 | 160 | 100 | D681 1200 |



D613 0004

D613 0007



D681 1000

Other sizes available on request: 460, 610 & 1000mm overall lengths.

The PGM standard (PGM stands for "Prüfgemeinschaft Mauerbohrer" – drill bit testing) is the only guarantee of a perfect geometry for the precise drilling and preferred setting of your anchor studs. It is recommended to use only drill bits with this marking for anchor fixings to prevent accidents and liability cases.

MASONRY SDS PLUS – REO PRO 3 CUT

Professional quality, 30% faster than conventional SDS drills.
Will drill through reinforced concrete mesh.



Unique TCT
Three cutting edge self centring tip prevents snagging on reinforced mesh



Sand-blasted Finish
Environmentally friendly production method with zero heavy metals

SDS Plus Shank
Suits ALL SDS Plus rotary hammer drills



Combination Spiral Flute
Half-round spiral accelerates dust extraction away from tip
Square spiral combines compression channel with a depression chamber for perfectly controlled dust removal

suttontools



Check out the demo



| Diameter mm | O/A Length | Flute Length | Item # |
|--------------------------------------|------------|--------------|-----------|
| 110mm overall length SDS Plus | | | |
| 5.0 | 110 | 50 | D619 0500 |
| 5.5 | 110 | 50 | D619 0550 |
| 6.0 | 110 | 50 | D619 0600 |
| 6.5 | 110 | 50 | D619 0650 |
| 8.0 | 110 | 50 | D619 0800 |
| 10.0 | 110 | 50 | D619 1000 |
| 160mm overall length SDS Plus | | | |
| 5.0 | 160 | 100 | D623 0500 |
| 5.5 | 160 | 100 | D623 0550 |
| 6.0 | 160 | 100 | D623 0600 |
| 6.5 | 160 | 100 | D623 0650 |
| 8.0 | 160 | 100 | D623 0800 |
| 10.0 | 160 | 100 | D623 1000 |
| 12.0 | 160 | 100 | D623 1200 |
| 13.0 | 160 | 100 | D623 1300 |
| 14.0 | 160 | 100 | D623 1400 |
| 210mm overall length SDS Plus | | | |
| 6.0 | 210 | 150 | D624 0600 |
| 6.5 | 210 | 150 | D624 0650 |
| 8.0 | 210 | 150 | D624 0800 |
| 10.0 | 210 | 150 | D624 1000 |
| 12.0 | 210 | 150 | D624 1200 |

| Diameter mm | O/A Length | Flute Length | Item # |
|--------------------------------------|------------|--------------|-----------|
| 13.0 | 210 | 150 | D624 1300 |
| 14.0 | 210 | 150 | D624 1400 |
| 16.0 | 210 | 150 | D624 1600 |
| 18.0 | 210 | 150 | D624 1800 |
| 20.0 | 210 | 150 | D624 2000 |
| 310mm overall length SDS Plus | | | |
| 6.0 | 310 | 250 | D625 0600 |
| 6.5 | 310 | 250 | D625 0650 |
| 8.0 | 310 | 250 | D625 0800 |
| 10.0 | 310 | 250 | D625 1000 |
| 12.0 | 310 | 250 | D625 1200 |
| 14.0 | 310 | 250 | D625 1400 |
| 16.0 | 310 | 250 | D625 1600 |
| 18.0 | 310 | 250 | D625 1800 |
| 20.0 | 310 | 250 | D625 2000 |
| 460mm overall length SDS Plus | | | |
| 8.0 | 460 | 400 | D626 0800 |
| 10.0 | 460 | 400 | D626 1000 |
| 12.0 | 460 | 400 | D626 1200 |
| 14.0 | 460 | 400 | D626 1400 |
| 16.0 | 460 | 400 | D626 1600 |
| 18.0 | 460 | 400 | D626 1800 |
| 20.0 | 460 | 400 | D626 2000 |


| Diameter mm | O/A Length | Flute Length | Item # |
|--------------------------------------|------------|--------------|-----------|
| Sets SDS Plus | | | |
| 4 Pce: 6, 8, 10, 12mm | 160 | 100 | D623 0004 |
| 7 Pce: 6, 8, 10, 6, 8, 10, 12 | 110 160 | 50 100 | D623 0007 |



D623 0004



D623 0007

 The PGM standard (PGM stands for "Prüfgemeinschaft Mauerbohrer" – drill bit testing) is the only guarantee of a perfect geometry for the precise drilling and preferred setting of your anchor studs. It is recommended to use only drill bits with this marking for anchor fixings to prevent accidents and liability cases.

MASONRY SDS MAX – REO PRO 3 CUT

Professional quality, 30% faster than conventional SDS drills.
Will drill through reinforced concrete mesh.

Unique TCT Tip
3 cutting edge self centring tip prevents snagging on reinforced mesh

Sand-blasted Finish
Environmentally friendly production method with zero heavy metals

SDS Max Shank
Suits ALL SDS Max rotary hammer drills



Combination Spiral Flute
Half-round spiral accelerates dust extraction away from tip.
Square spiral combines compression channel with a depression chamber for perfectly controlled dust removal

| Diameter mm | O/A Length | Flute Length | Item # |
|-------------------------------------|------------|--------------|-----------|
| 340mm overall length SDS Max | | | |
| 12.0 | 340 | 200 | D675 1200 |
| 14.0 | 340 | 200 | D675 1400 |
| 16.0 | 340 | 200 | D675 1600 |
| 18.0 | 340 | 200 | D675 1800 |
| 20.0 | 340 | 200 | D675 2000 |
| 540mm overall length SDS Max | | | |
| 12.0 | 540 | 400 | D676 1200 |
| 14.0 | 540 | 400 | D676 1400 |
| 16.0 | 540 | 400 | D676 1600 |
| 18.0 | 540 | 400 | D676 1800 |
| 20.0 | 540 | 400 | D676 2000 |



SDS PLUS – SC4 DRILL BITS

- SDS plus -SC4 Drill Bits have a SOLID CARBIDE head.
- Sharp pyramid shaped centring tip, provides stability at the start of drilling.
- Extremely Heavy Duty.
- The SOLID CARBIDE four head cutting design allows for a neat true hole.
- Made in Germany

Dimensions of Drill Bits are in millimeters (mm)

| Code | Description | Flute Length | Overall Length |
|-------|-------------|--------------|----------------|
| 28968 | 5 x 115 | 50 | 115 |
| 28969 | 5 x 165 | 100 | 165 |
| 28970 | 5.5 x 115 | 50 | 115 |
| 28971 | 5.5 x 165 | 100 | 165 |
| 28972 | 6 x 115 | 50 | 115 |
| 28973 | 6 x 165 | 100 | 165 |
| 28974 | 6 x 215 | 150 | 215 |
| 28975 | 6 x 315 | 250 | 315 |
| 28976 | 6.5 x 115 | 50 | 115 |
| 28977 | 6.5 x 165 | 100 | 165 |
| 28978 | 6.5 x 315 | 250 | 315 |
| 28979 | 8 x 115 | 50 | 115 |
| 28980 | 8 x 165 | 100 | 165 |
| 28981 | 8 x 215 | 150 | 215 |
| 28982 | 8 x 315 | 250 | 315 |
| 28983 | 10 x 115 | 50 | 115 |
| 28984 | 10 x 165 | 100 | 165 |
| 28985 | 10 x 215 | 150 | 215 |
| 28986 | 10 x 315 | 250 | 315 |
| 28987 | 10 x 465 | 400 | 465 |
| 28988 | 12 x 165 | 100 | 165 |
| 28989 | 12 x 215 | 150 | 215 |
| 28990 | 12 x 265 | 200 | 265 |
| 28991 | 12 x 315 | 250 | 315 |
| 28992 | 12 x 465 | 400 | 465 |
| 28993 | 14 x 265 | 200 | 265 |
| 28994 | 14 x 315 | 250 | 315 |
| 28995 | 16 x 265 | 200 | 265 |
| 28996 | 16 x 315 | 250 | 315 |
| 28997 | 16 x 465 | 400 | 465 |
| 28998 | 18 x 250 | 200 | 250 |
| 28999 | 18 x 450 | 400 | 450 |
| 29000 | 20 x 250 | 200 | 250 |
| 29001 | 20 x 450 | 400 | 450 |
| 29002 | 22 x 250 | 200 | 250 |
| 29003 | 22 x 450 | 400 | 450 |
| 29004 | 24 x 450 | 400 | 450 |
| 29005 | 25 x 450 | 400 | 450 |

The solid carbide four head cutting design allows for a neat true hole.

Sharp pyramid shaped centring tip, provides stability at the start of drilling.

Flutes have been designed for effective dust removal.

As proof of quality, flute is stamped with the test mark of the PGM Masonry Drill Bit Association.

Bears a wear mark indicating if the diameter of the hole is still in tolerance for metal anchor setting.



SDS PLUS 4 CUT



MILWAUKEE® SDS Plus MX4 Drill Bits have symmetrical 4 cutter geometry (4 x 90°) & perfect round holes for optimal anchor fitting. The high volume 4 flute geometry ensures the optimum removal of dust and debris. There is a centering tip for easy spot drilling with pinpoint accuracy. A welded solid carbide tip on ø 5-10mm allows for wider flute entrance leading to increased speed. More carbide leads to a higher durability of the tip and higher lifetime. The 4 breaker points pulverize material more efficiently for faster drilling, Enhanced rebar guards for an improved resistance when hitting rebar. New variable flute design has a thin flute at the tip for maximum debris extraction, higher speed and less friction. Thick flute at the base for higher stability and reduced bit breakage.




| Product Code | Description |
|--------------|---------------------------------|
| 4932352007 | SDS PLUS 4 CUT 5 x 110mm |
| 4932478529 | SDS PLUS 4 CUT 5 x 110mm (5) |
| 4932352008 | SDS PLUS 4 CUT 5 x 160mm |
| 4932479669 | SDS PLUS 4 CUT 5 x 160mm (5) |
| 4932352009 | SDS PLUS 4 CUT 5.5 x 110mm |
| 4932479670 | SDS PLUS 4 CUT 5.5 x 110mm (5) |
| 4932352010 | SDS PLUS 4 CUT 5.5 x 160mm |
| 4932352041 | SDS PLUS 4 CUT 5.5 x 160mm (10) |
| 4932352011 | SDS PLUS 4 CUT 6 x 110mm |
| 4932478530 | SDS PLUS 4 CUT 6 x 110mm (5) |
| 4932352012 | SDS PLUS 4 CUT 6 x 160mm |
| 4932352043 | SDS PLUS 4 CUT 6 x 160mm (10) |
| 4932352013 | SDS PLUS 4 CUT 6 x 210mm |
| 4932352014 | SDS PLUS 4 CUT 6 x 260mm |
| 4932352015 | SDS PLUS 4 CUT 6 x 310mm |
| 4932430134 | SDS PLUS 4 CUT 6.5 x 110mm |
| 4932479672 | SDS PLUS 4 CUT 6.5 x 110mm (5) |
| 4932430146 | SDS PLUS 4 CUT 6.5 x 160mm |
| 4932479673 | SDS PLUS 4 CUT 6.5 x 160mm (5) |
| 4932352016 | SDS PLUS 4 CUT 6.5 x 210mm |
| 4932430235 | SDS PLUS 4 CUT 6.5 x 210mm (10) |
| 4932352017 | SDS PLUS 4 CUT 6.5 x 260mm |
| 4932352018 | SDS PLUS 4 CUT 6.5 x 310mm |
| 4932352019 | SDS PLUS 4 CUT 7 x 110mm |
| 4932352020 | SDS PLUS 4 CUT 7 x 160mm |
| 4932352021 | SDS PLUS 4 CUT 8 x 110mm |
| 4932352022 | SDS PLUS 4 CUT 8 x 160mm |
| 4932352046 | SDS PLUS 4 CUT 8 x 160mm (10) |
| 4932352023 | SDS PLUS 4 CUT 8 x 210mm |
| 4932478534 | SDS PLUS 4 CUT 8 x 210mm (5) |
| 4932352712 | SDS PLUS 4 CUT 8 x 310mm |
| 4932352024 | SDS PLUS 4 CUT 8 x 260mm |
| 4932352025 | SDS PLUS 4 CUT 10 x 110mm |
| 4932352026 | SDS PLUS 4 CUT 10 x 160mm |
| 4932352047 | SDS PLUS 4 CUT 10 x 160mm (10) |
| 4932352027 | SDS PLUS 4 CUT 10 x 210mm |
| 4932352048 | SDS PLUS 4 CUT 10 x 210mm (10) |
| 4932352028 | SDS PLUS 4 CUT 10 x 260mm |
| 4932352029 | SDS PLUS 4 CUT 10 x 310mm |
| 4932352030 | SDS PLUS 4 CUT 10 x 450mm |
| 4932352945 | SDS PLUS 4 CUT 10 x 600mm |

| Product Code | Description |
|--------------|--------------------------------|
| 4932352946 | SDS PLUS 4 CUT 10 x 1000mm |
| 4932352031 | SDS PLUS 4 CUT 12 x 160mm |
| 4932352049 | SDS PLUS 4 CUT 12 x 160mm (10) |
| 4932352032 | SDS PLUS 4 CUT 12 x 210mm |
| 4932352050 | SDS PLUS 4 CUT 12 x 210mm (10) |
| 4932352033 | SDS PLUS 4 CUT 12 x 260mm |
| 4932352034 | SDS PLUS 4 CUT 12 x 310mm |
| 4932352035 | SDS PLUS 4 CUT 12 x 450mm |
| 4932352947 | SDS PLUS 4 CUT 12 x 600mm |
| 4932352948 | SDS PLUS 4 CUT 12 x 1000mm |
| 4932430136 | SDS PLUS 4 CUT 13 x 160mm |
| 4932352036 | SDS PLUS 4 CUT 14 x 160mm |
| 4932352037 | SDS PLUS 4 CUT 14 x 210mm |
| 4932352949 | SDS PLUS 4 CUT 14 x 260mm |
| 4932352038 | SDS PLUS 4 CUT 14 x 310mm |
| 4932352039 | SDS PLUS 4 CUT 14 x 450mm |
| 4932352950 | SDS PLUS 4 CUT 14 x 600mm |
| 4932352951 | SDS PLUS 4 CUT 14 x 1000mm |
| 4932430138 | SDS PLUS 4 CUT 15 x 210mm |
| 4932352952 | SDS PLUS 4 CUT 15 x 260mm |
| 4932430726 | SDS PLUS 4 CUT 16 x 160mm |
| 4932352953 | SDS PLUS 4 CUT 16 x 210mm |
| 4932352819 | SDS PLUS 4 CUT 16 x 260mm |
| 4932352954 | SDS PLUS 4 CUT 16 x 310mm |
| 4932352820 | SDS PLUS 4 CUT 16 x 450mm |
| 4932352955 | SDS PLUS 4 CUT 16 x 600mm |
| 4932352956 | SDS PLUS 4 CUT 16 x 1000mm |
| 4932356502 | SDS PLUS 4 CUT 18 x 250mm |
| 4932356503 | SDS PLUS 4 CUT 18 x 450mm |
| 4932356504 | SDS PLUS 4 CUT 20 x 250mm |
| 4932356505 | SDS PLUS 4 CUT 20 x 450mm |
| 4932399332 | SDS PLUS 4 CUT 22 x 250mm |
| 4932356506 | SDS PLUS 4 CUT 22 x 450mm |
| 4932356507 | SDS PLUS 4 CUT 24 x 250mm |
| 4932356508 | SDS PLUS 4 CUT 24 x 450mm |
| 4932399333 | SDS PLUS 4 CUT 25 x 250mm |
| 4932356509 | SDS PLUS 4 CUT 25 x 450mm |
| 4932356510 | SDS PLUS 4 CUT 28 x 450mm |
| 4932356511 | SDS PLUS 4 CUT 30 x 450mm |
| 4932399335 | SDS PLUS 4 CUT 30 x 250mm |
| 4932399336 | SDS PLUS 4 CUT 32 x 450mm |

MASONRY SDS PLUS – 4 CUT

Professional quality.
For reinforced concrete,
brick, aerated concrete,
stone and granite.

suttontools

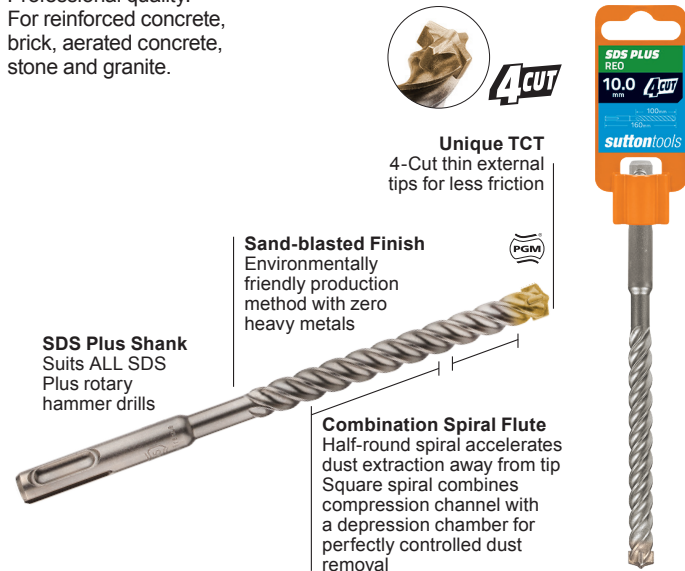

SDS PLUS 4 CUT KITS



| Product Code | Description |
|--------------|-----------------------------------------------|
| 49323555 | SDS PLUS 4 CUT Drill Bit Set with Pouch 8 Pce |

ZENTRO® SDS PLUS | 4 HEAD CUT

Excellent performance in concrete with REO

Unique 4 head geometry ensures precision drill holes



4 HEAD CUT

Dynamic drilling ability, with secondary cutters protecting the drill bit in the event of reinforcement collision

SDS drill bits with the PGM certification mark are suitable for the safe installation of anchor fixings. Tolerances are tailored to metal, bonded and plastic anchors.

Ideal for: All masonry applications including concrete with REO



- Tungsten carbide tipped for longevity
- Strengthened flute



SDS Plus available in sizes 5 to 32mm



ZENTRO® SDS MAX | 4 HEAD CUT

Excellent performance in concrete with REO

Unique 4 head geometry ensures precision drill holes



4 HEAD CUT

Dynamic drilling ability, with secondary cutters protecting the drill bit in the event of reinforcement collision

SDS drill bits with the PGM certification mark are suitable for the safe installation of anchor fixings. Tolerances are tailored to metal, bonded and plastic anchors.

Ideal for: All masonry applications including concrete with REO



- Tungsten carbide tipped for longevity
- Strengthened flute



SDS Max available in sizes 12 to 52mm




SDS MAX DUSTLESS MASONRY DRILL BIT



Ideal for: Hardened Concrete & Masonry
SDS Dustless Drill available in sizes 1/2in & 16-28mm

4 Cutter Tungsten Tip



SDS Max fitment

Swivel universal dust extractor adaptor

Dual dust extraction holes

For use in SDS Max Rotary Hammer Drills with separate dust extraction. Reduces labour costs and removes hazardous dust for a cleaner and safer work environment.



| Diameter mm | O/A Length | Flute Length | Item # |
|--------------------------------------------|------------|--------------|-----------|
| 110mm overall length SDS Plus Shank | | | |
| 6.0 | 110 | 50 | D631 0600 |
| 8.0 | 110 | 50 | D631 0800 |
| 160mm overall length SDS Plus Shank | | | |
| 5.0 | 160 | 100 | D632 0500 |
| 6.0 | 160 | 100 | D632 0600 |
| 6.5 | 160 | 100 | D632 0650 |
| 8.0 | 160 | 100 | D632 0800 |
| 10.0 | 160 | 100 | D632 1000 |
| 12.0 | 160 | 100 | D632 1200 |
| 210mm overall length SDS Plus Shank | | | |
| 6.0 | 210 | 150 | D633 0600 |
| 6.5 | 210 | 150 | D633 0650 |
| 8.0 | 210 | 150 | D633 0800 |
| 10.0 | 210 | 150 | D633 1000 |
| 12.0 | 210 | 150 | D633 1200 |
| 14.0 | 210 | 150 | D633 1400 |
| 16.0 | 210 | 150 | D633 1600 |
| 260mm overall length SDS Plus Shank | | | |
| 6.0 | 260 | 200 | D634 0600 |
| 8.0 | 260 | 200 | D634 0800 |
| 10.0 | 260 | 200 | D634 1000 |
| 12.0 | 260 | 200 | D634 1200 |
| 310mm overall length SDS Plus Shank | | | |
| 6.0 | 310 | 260 | D635 0600 |
| 6.5 | 310 | 260 | D635 0650 |
| 8.0 | 310 | 260 | D635 0800 |
| 10.0 | 310 | 260 | D635 1000 |
| 12.0 | 310 | 260 | D635 1200 |
| 14.0 | 310 | 260 | D635 1400 |
| 16.0 | 310 | 260 | D635 1600 |
| 18.0 | 310 | 260 | D635 1800 |
| 20.0 | 310 | 260 | D635 2000 |
| 460mm overall length SDS Plus Shank | | | |
| 10.0 | 460 | 400 | D637 1000 |
| 12.0 | 460 | 400 | D637 1200 |
| 14.0 | 460 | 400 | D637 1400 |
| 16.0 | 460 | 400 | D637 1600 |
| 20.0 | 460 | 400 | D637 2000 |
| 10 Pce Bulk Pack SDS Plus Shank | | | |
| 5.0 | 160 | 100 | D682 0500 |
| 6.0 | 160 | 100 | D682 0600 |
| 6.5 | 160 | 100 | D682 0650 |
| 8.0 | 160 | 100 | D682 0800 |
| 10.0 | 160 | 100 | D682 1000 |
| 12.0 | 160 | 100 | D682 1200 |
| 10 Pce Bulk Pack SDS Plus Shank | | | |
| 10.0 | 210 | 150 | D683 1000 |
| 12.0 | 210 | 150 | D683 1200 |

SDS MAX



Features:

- Especially developed robust head geometry with optimum 4 x 90° symmetry of carbide tip: Reduces jamming up on hitting reinforcing steel.
- Centering point with 130° point angle: Easy spot drilling with pinpoint accuracy and ensures optimum guidance during drilling.
- Robust secondary cutter with dynamic curved cutting edge: Supports the primary cutter for faster drilling.
- Shorter spiral windings: This allows for faster transport of drilling dust from the head to the flute = Less wear and heat build-up at the tip.
- Unique carbide tip: With more carbide on all diameters and extra carbide on $\varnothing > 32\text{mm}$.
- Wear mark on both sides of primary cutter: Guarantees diameter accuracy (i.e. for anchor fittings) and acts as a life time indicator in warranty cases.

- Deep flute shoulders: High volume dust removal for optimum drilling.
- Less wear and heat build-up.
- Low vibration drilling performance: Comfortable drilling ensures less stress for man and machine.
- Special surface treatment: Shot blasting provides a smooth surface and densifies the surface structure and makes the bit more wear resistant.
- PGM Conformity: Guarantees precise holes for anchor fitting over the entire life time of the drill bit.
- Made in Germany



| Product Code | Description |
|--------------|---------------------------|
| 4932352750 | SDS MAX 4 CUT 12 x 340mm |
| 4932352751 | SDS MAX 4 CUT 12 x 540mm |
| 4932430132 | SDS MAX 4 CUT 12 x 690mm |
| 4932352752 | SDS MAX 4 CUT 14 x 340mm |
| 4932352753 | SDS MAX 4 CUT 14 x 540mm |
| 4932352754 | SDS MAX 4 CUT 15 x 340mm |
| 4932352755 | SDS MAX 4 CUT 15 x 540mm |
| 4932352756 | SDS MAX 4 CUT 16 x 340mm |
| 4932352757 | SDS MAX 4 CUT 16 x 540mm |
| 4932352758 | SDS MAX 4 CUT 16 x 920mm |
| 4932352759 | SDS MAX 4 CUT 16 x 1320mm |
| 4932352760 | SDS MAX 4 CUT 18 x 340mm |
| 4932352761 | SDS MAX 4 CUT 18 x 540mm |
| 4932352762 | SDS MAX 4 CUT 18 x 920mm |
| 4932352763 | SDS MAX 4 CUT 18 x 1320mm |
| 4932352764 | SDS MAX 4 CUT 20 x 320mm |
| 4932352765 | SDS MAX 4 CUT 20 x 520mm |
| 4932352766 | SDS MAX 4 CUT 20 x 920mm |
| 4932352767 | SDS MAX 4 CUT 20 x 1320mm |
| 4932352768 | SDS MAX 4 CUT 22 x 320mm |
| 4932352769 | SDS MAX 4 CUT 22 x 520mm |
| 4932352770 | SDS MAX 4 CUT 22 x 920mm |
| 4932352771 | SDS MAX 4 CUT 22 x 1320mm |
| 4932352772 | SDS MAX 4 CUT 24 x 320mm |
| 4932352773 | SDS MAX 4 CUT 24 x 520mm |
| 4932352774 | SDS MAX 4 CUT 25 x 320mm |
| 4932352775 | SDS MAX 4 CUT 25 x 520mm |

| Product Code | Description |
|--------------|---------------------------|
| 4932352776 | SDS MAX 4 CUT 25 x 920mm |
| 4932352777 | SDS MAX 4 CUT 25 x 1320mm |
| 4932430728 | SDS MAX 4 CUT 26 x 520mm |
| 4932352778 | SDS MAX 4 CUT 28 x 370mm |
| 4932352779 | SDS MAX 4 CUT 28 x 570mm |
| 4932352780 | SDS MAX 4 CUT 28 x 670mm |
| 4932352781 | SDS MAX 4 CUT 28 x 920mm |
| 4932352782 | SDS MAX 4 CUT 28 x 1320mm |
| 4932352783 | SDS MAX 4 CUT 30 x 370mm |
| 4932352784 | SDS MAX 4 CUT 30 x 570mm |
| 4932352785 | SDS MAX 4 CUT 32 X 370mm |
| 4932352786 | SDS MAX 4 CUT 32 x 570mm |
| 4932352787 | SDS MAX 4 CUT 32 x 920mm |
| 4932352788 | SDS MAX 4 CUT 32 x 1320mm |
| 4932352789 | SDS MAX 4 CUT 35 x 370mm |
| 4932352790 | SDS MAX 4 CUT 35 x 570mm |
| 4932430814 | SDS MAX 4 CUT 35 x 670mm |
| 4932430364 | SDS MAX 4 CUT 37 x 370mm |
| 4932430751 | SDS MAX 4 CUT 37 x 570mm |
| 4932352792 | SDS MAX 4 CUT 38 x 370mm |
| 4932352793 | SDS MAX 4 CUT 38 x 570mm |
| 4932352794 | SDS MAX 4 CUT 40 x 370mm |
| 4932352795 | SDS MAX 4 CUT 40 x 570mm |
| 4932352796 | SDS MAX 4 CUT 40 x 920mm |
| 4932352797 | SDS MAX 4 CUT 40 x 1320mm |
| 4932352798 | SDS MAX 4 CUT 45 x 570mm |
| 4932352799 | SDS MAX 4 CUT 52 x 570mm |

VACUUM DRILL BITS




| Product Code | Description |
|--------------|------------------------------------|
| 4932459283 | SDS PLUS Vacuum Drill Bit 12 x 325 |
| 4932459284 | SDS PLUS Vacuum Drill Bit 14 x 360 |
| 4932459285 | SDS PLUS Vacuum Drill Bit 16 x 360 |
| 4932459286 | SDS PLUS Vacuum Drill Bit 18 x 360 |
| 4932459287 | SDS MAX Vacuum Drill Bit 16 x 600 |
| 4932459288 | SDS MAX Vacuum Drill Bit 18 x 600 |
| 4932459289 | SDS MAX Vacuum Drill Bit 20 x 600 |
| 4932459290 | SDS MAX Vacuum Drill Bit 22 x 600 |
| 4932459291 | SDS MAX Vacuum Drill Bit 24 x 600 |
| 4932459292 | SDS MAX Vacuum Drill Bit 25 x 600 |
| 4932459293 | SDS MAX Vacuum Drill Bit 28 x 600 |
| 4932459295 | SDS MAX Vacuum Drill Bit 30 x 600 |
| 4932459297 | SDS MAX Vacuum Drill Bit 32 x 600 |
| 4932459299 | SDS MAX Vacuum Drill Bit 35 x 600 |



DRILLS MASONRY SDS MAX – REO EXTREME 10 CUT

100% Carbide head. Superior performance in reinforced concrete. Fits SDS Max drills.

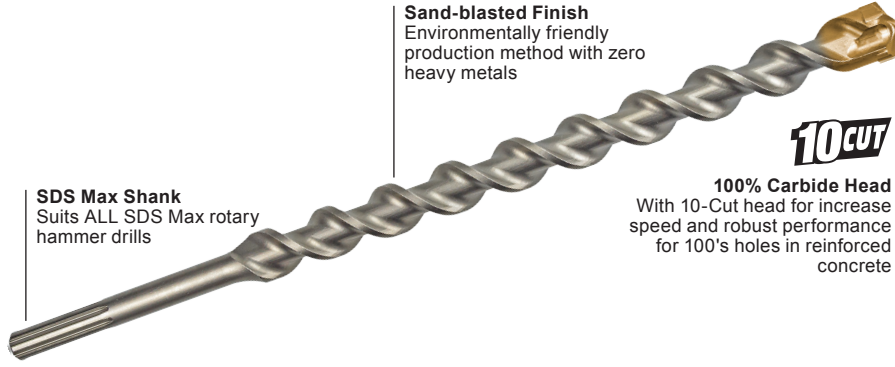


SDS Max Shank
Suits ALL SDS Max rotary hammer drills

Sand-blasted Finish
Environmentally friendly production method with zero heavy metals

10 CUT

100% Carbide Head
With 10-Cut head for increase speed and robust performance for 100's holes in reinforced concrete



Check out the demo



| Diameter mm | O/A Length | Flute Length | Item # |
|-----------------------------|------------|--------------|-----------|
| 340mm overall length | | | |
| 14.0 | 340 | 200 | D644 1400 |
| 16.0 | 340 | 200 | D644 1600 |
| 18.0 | 340 | 200 | D644 1800 |
| 20.0 | 340 | 200 | D644 2000 |
| 22.0 | 340 | 200 | D644 2200 |
| 24.0 | 340 | 200 | D644 2400 |
| 25.0 | 340 | 200 | D644 2500 |
| 26.0 | 340 | 200 | D644 2600 |
| 28.0 | 340 | 200 | D644 2800 |
| 30.0 | 340 | 200 | D644 3000 |
| 32.0 | 340 | 200 | D644 3200 |
| 36.0 | 340 | 200 | D644 3600 |
| 38.0 | 340 | 200 | D644 3800 |

| Diameter mm | O/A Length | Flute Length | Item # |
|-----------------------------|------------|--------------|-----------|
| 40.0 | 340 | 200 | D644 4000 |
| 42.0 | 340 | 200 | D644 4200 |
| 45.0 | 340 | 200 | D644 4500 |
| 540mm overall length | | | |
| 16.0 | 540 | 400 | D645 1600 |
| 18.0 | 540 | 400 | D645 1800 |
| 20.0 | 540 | 400 | D645 2000 |
| 22.0 | 540 | 400 | D645 2200 |
| 24.0 | 540 | 400 | D645 2400 |
| 25.0 | 540 | 400 | D645 2500 |
| 26.0 | 540 | 400 | D645 2600 |
| 28.0 | 540 | 400 | D645 2800 |
| 30.0 | 540 | 400 | D645 3000 |
| 32.0 | 540 | 400 | D645 3200 |

| Diameter mm | O/A Length | Flute Length | Item # |
|-----------------------------|------------|--------------|-----------|
| 690mm overall length | | | |
| 16.0 | 690 | 550 | D646 1600 |
| 18.0 | 690 | 550 | D646 1800 |
| 20.0 | 690 | 550 | D646 2000 |
| 22.0 | 690 | 550 | D646 2200 |
| 24.0 | 690 | 550 | D646 2400 |
| 25.0 | 690 | 550 | D646 2500 |
| 26.0 | 690 | 550 | D646 2600 |
| 28.0 | 690 | 550 | D646 2800 |
| 30.0 | 690 | 550 | D646 3000 |

Other sizes available on request: 540, 690, 920, 1300, 1500mm

MASONRY SDS MAX – SPEEDUSTER 10 CUT

Designed for clean and fast drilling with its 10 cutters, 100% carbide massive head system. Wide extraction holes allows immediate dust extraction with an attached vacuum via the connecting sleeves.

The dust extraction also allows faster drilling due to minimal blockage during drilling and can significantly extend tool life. For heavy duty drilling in reinforced concrete, concrete, granite, stone and bricks.

DRILLING COMPARISON

Standard SDS Max Drill




Dust pile



SPEEDUSTER SDS MAX



Clean holes

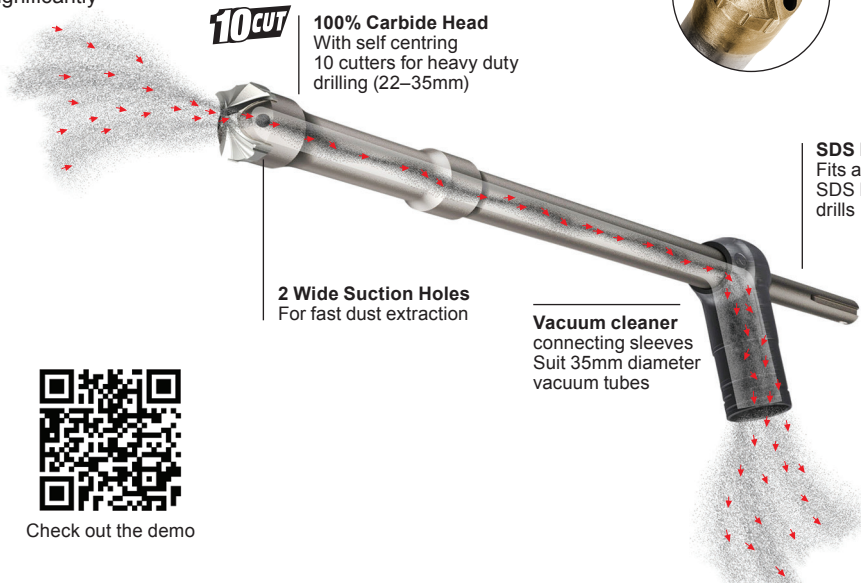

10 CUT

100% Carbide Head
With self centring 10 cutters for heavy duty drilling (22–35mm)

2 Wide Suction Holes
For fast dust extraction

Vacuum cleaner connecting sleeves
Suit 35mm diameter vacuum tubes

SDS Max
Fits all SDS Max drills



Check out the demo

| Diameter mm | O/A Length | Flute Length | Item # |
|-------------------|------------|--------------|-----------|
| Speeduster | | | |
| | mm | mm | |
| 14* | 610 | 400 | D640 0140 |
| 16* | 610 | 400 | D640 0160 |
| 18* | 610 | 400 | D640 0180 |
| 20* | 610 | 400 | D640 0200 |
| 22 | 610 | 400 | D640 0220 |

| Diameter mm | O/A Length | Flute Length | Item # |
|-----------------------------|------------|--------------|-----------|
| 25 | 610 | 400 | D640 0250 |
| 28 | 610 | 400 | D640 0280 |
| 30 | 610 | 400 | D640 0300 |
| 32 | 610 | 400 | D640 0320 |
| 35 | 610 | 400 | D640 0350 |
| Collector & Seal | | | D640 0001 |

*Equipped with 3-Cut TCT Tip.

TUNGSTEN CARBIDE REBAR CUTTERS



At last, the answer to drilling through concrete-embedded rebar!

No more broken or shattered hammer bits; now you can drill through the rebar and not have to relocate the hole!

Improved productivity with fast and efficient rebar cutting. More holes per hour.

TUNGSTEN CARBIDE TIPPED REBAR CUTTERS

| Model No | Specifications |
|----------------|------------------------------------------------|
| 2536-10.00X305 | TCT SINGLE PIECE REBAR CUTTER - 10MM OAL 305MM |
| 2536-12.00X305 | TCT SINGLE PIECE REBAR CUTTER - 12MM OAL 305MM |
| 2536-14.00X305 | TCT SINGLE PIECE REBAR CUTTER - 14MM OAL 305MM |
| 2536-16.00X305 | TCT SINGLE PIECE REBAR CUTTER - 16MM OAL 305MM |
| 2536-18.00X305 | TCT SINGLE PIECE REBAR CUTTER - 18MM OAL 305MM |
| 2536-20.00X305 | TCT SINGLE PIECE REBAR CUTTER - 20MM OAL 305MM |
| 2536-22.00X305 | TCT TWO PIECE REBAR CUTTER - 22MM OAL 305MM |
| 2536-24.00X305 | TCT TWO PIECE REBAR CUTTER - 24MM OAL 305MM |
| 2536-28.00X305 | TCT TWO PIECE REBAR CUTTER - 28MM OAL 305MM |
| 2536-30.00X305 | TCT TWO PIECE REBAR CUTTER - 30MM OAL 305MM |

SDS PLUS SHANKS TO SUIT TWO PIECE REBAR CUTTERS

| Model No | Specifications |
|------------|-------------------------------------------|
| 2536-SDS12 | REPLACEMENT 205MM SHANK |
| 2536-SDS18 | 355MM SHANK (PLUS 100MM CUTTER) OAL 455MM |
| 2536-SDS24 | 510MM SHANK (PLUS 100MM CUTTER) OAL 610MM |

