

**1L MULTI PURPOSE TOP UP KIT**  
7701A


- Ideal for topping up difficult to access oiling points in the workshop & at home
- Suitable for all oils, automatic transmission fluids, brake fluids & some hand cleaners
- Not suitable for combustible fluids
- Self-contained unit prevents oil contamination when not in use
- Container capacity of 1L



**ALEMLUBE 1L, 2L, 4L & 5L CONTAINER OIL PUMPS**  
7700 Series

- Suitable for use with hydraulic oil, engine oil, gear oil & transmission fluids

Product No.	Suits	mL / Stroke
7701B	1L container	6
7702B	2L container	6
7704C	4L container	6
7705B	5L container	6
7705C	5L container	6

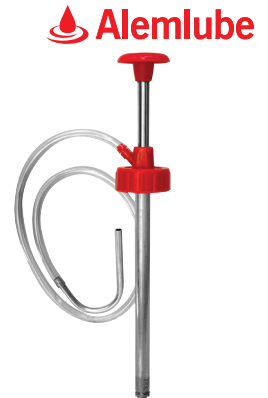

**HEAVY DUTY 20L GEAR OIL DRUM PUMP**  
10028

- Heavy duty fully serviceable drum pump delivers 170mL on the downstroke
- Height adjustable bung adaptor & two extra adaptors to suit local and international 20L drums supplied standard
- Ideal for use with engine, hydraulic, gear, diff & synthetic oils
- Also suitable for underground coal mine use



**SAMOA OIL TRANSFER KIT WITH METER**  
454110N

- 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & electronic resettable meter
- Flow rates of up to 12L/min
- Air pressure range from 20psi to 140psi
- Air consumption 180NL/min (6.4 cfm)
- Air inlet: 1/4" BSP(f)
- Fluid outlet: 1/2" BSP(f)

- 454111N Oil Transfer Kit with On/Off Gun



**IBC OIL STORAGE & TRANSFER KIT**  
454697C

- Unit includes a 1,000L IBC container, 3:1 ratio pump, hose reel inclusive of 10m of hose, a side mounting bracket & an electronic oil meter
- Environmentally friendly as costly & time consuming empty 205L drum disposal is no longer required
- 3:1 ratio pump facilitates flow rates of up to 18L/min
- Dual pedestal hose reel provides a long service life



**STATIONARY OIL PUMP, REEL & METER KIT**  
454600N

- Includes a 3:1 ratio drum pump, 10m hose reel, electronic meter and a 2m pump to hose reel connection hose
- Adjustable flow rates of up to 10L/min
- 3:1 ratio pump suits 205L drums
- Dual pedestal hose reel withstands angular hose pull

- 454601 Also available with a preset meter  
- 454599 Also available with on/off gun



**SAMOA OIL CONTROL VALVE**  
363114

- Flow rates of up to 40L/min
- Maximum working pressure of 1,450psi (100bar)
- 1/2" BSP(f) inlet port & swivel
- Trigger lock helps to prevent accidental dispensing
- Compact ball bearing swivel with integrated oil filter ensures a long working life



**5L OIL CONTAINER WITH 25MM POUR LID KIT**  
001014-25

- Fully sealed system reduces the chance of lubricant contamination
- Colour coding accurately identifies fluids to minimise cross contamination
- HDPE construction with UV & anti static resistant qualities

- 001014-PU Also available 5L container pump kit



**SAMOA ELECTRONIC OIL METER**  
365534

- Electronically meters & totalises the amount of lubricant dispensed
- Maximum flow rate of 30L/min
- Fluid inlet is a 1/2" BSP(f) swivel
- Maximum operating pressure of 1,450psi (100bar)
- Control valve can be automatically locked as required
- Also suitable for use with ATF & antifreeze



**3/4" AIR OPERATED DIAPHRAGM PUMP**  
ALE-20BAH

- Maximum flow rates of 100L/min
- 3/4" BSP(f) inlet/outlet
- Aluminium body & hytrel diaphragms
- Rugged bolted construction eliminates leaks & simplifies post maintenance reassembly
- Also suitable for the transfer of diesel fuel, gear oil, engine oil, antifreeze & waste water

