

ROTARY ACTION DRUM PUMP 501A

- Suitable for the transfer of diesel, petrols, kerosene, lube oil & machine oil
- Delivery rates of up to 18L/min or 0.26L per rotation
- Length: 1,300mm (4.3ft)
- Delivery tube: 31.8mm (1") OD
- Includes 2.2m of farm tank hose, bung adaptor, rubber gasket, a four chamber rotor assembly, spout & spout holster



Alemlube

HEAVY DUTY HI-FLO REFUELLING DRUM PUMP 5060AN

- Delivery rates of 1.1 litres per rotation
- Supplied complete with 2.6m of UV & fuel resistant hose, spout, in built spout holster, 3-piece downtube, bung adaptor
- 3-piece downtube suits 60L & 205L drums and IBC's
- Suitable for the transfer of diesel fuel, petrol, light oils up to SAE30 & kerosene



Alemlube

1" AUTOMATIC DIESEL NOZZLE 51039

- Automatically cuts off when fuel tank is full
- Can operate with flow rates of up to 120L/min
- 1" BSP(f) swivel included
- Suitable for applications involving an electric diesel transfer pump
- **51039P** Also available but for petrol



Alemlube

IN LINE ELECTRONIC FUEL METER 407010N2

- Turbine type meter with aluminium body & polypropylene turbine
- Accurate flow rates of 20 to 120L/min
- Field calibration is possible
- Maximum operating pressure of 290psi (20 bar)
- 6-digit total from 1 to 999,999
- Also suitable for use with diesel, antifreeze & kerosene



Alemlube

LOCKABLE DIESEL REFUELLING STORAGE & DISPENSING KITS

- Flow rates of up to 50L/min
- Heavy duty, robustly constructed polyethylene tank
- Built in nozzle holster
- Unique user friendly design with lockable lid to aid fuel & dispensing kit security
- Dispensing kit consists of a 12V pump, 4m antistatic fuel delivery hose, 2m battery cables & automatic nozzle
- Recesses for tie down straps aid handling
- Forklift lift points
- Suitable for diesel fuel only

Product No.	Capacity	Flow Rate	Meter
L60040PAM	600L	50L/min	Yes
L60040PA	600L	50L/min	No
L45040PAM	450L	50L/min	Yes
L45040PA	450L	50L/min	No
L20040PAM	200L	50L/min	Yes
L20040PA	200L	50L/min	No
L10040PAM	100L	50L/min	Yes
L10040PA	100L	50L/min	No



Alemlube

1L BRAKE CLEANER SPRAYER 6603A

- Large filling opening
- Safety valve at 36psi (2.5bar) with depressurisation option
- Easy tool free maintenance
- Strong translucent bottle with level indicator
- Ergonomic design
- Not suitable for use with acids



Alemlube

20L GEAR OIL DRUM PUMP 8828N2

- Capable of delivering up to 110mL per stroke
- Ideal pump for the transfer of engine, gear, diff & hydraulic oils
- Drainback nozzle holster ensures that excess oil ends up back in the drum
- Drain back holster filter protects against foreign particle contamination
- **7710B** Also available suits 10L drum



Alemlube

1L MULTI PURPOSE TOP UP KIT
7701A


- Ideal for topping up difficult to access oiling points in the workshop & at home
- Suitable for all oils, automatic transmission fluids, brake fluids & some hand cleaners
- Not suitable for combustible fluids
- Self-contained unit prevents oil contamination when not in use
- Container capacity of 1L



ALEMLUBE 1L, 2L, 4L & 5L CONTAINER OIL PUMPS
7700 Series

- Suitable for use with hydraulic oil, engine oil, gear oil & transmission fluids

Product No.	Suits	mL / Stroke
7701B	1L container	6
7702B	2L container	6
7704C	4L container	6
7705B	5L container	6
7705C	5L container	6

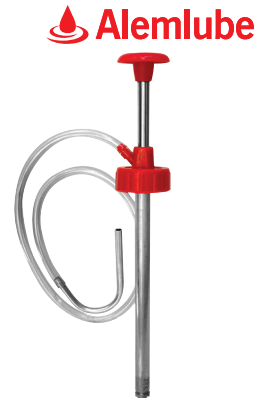

HEAVY DUTY 20L GEAR OIL DRUM PUMP
10028

- Heavy duty fully serviceable drum pump delivers 170mL on the downstroke
- Height adjustable bung adaptor & two extra adaptors to suit local and international 20L drums supplied standard
- Ideal for use with engine, hydraulic, gear, diff & synthetic oils
- Also suitable for underground coal mine use



SAMOA OIL TRANSFER KIT WITH METER
454110N

- 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & electronic resettable meter
- Flow rates of up to 12L/min
- Air pressure range from 20psi to 140psi
- Air consumption 180NL/min (6.4 cfm)
- Air inlet: 1/4" BSP(f)
- Fluid outlet: 1/2" BSP(f)

- 454111N Oil Transfer Kit with On/Off Gun



IBC OIL STORAGE & TRANSFER KIT
454697C

- Unit includes a 1,000L IBC container, 3:1 ratio pump, hose reel inclusive of 10m of hose, a side mounting bracket & an electronic oil meter
- Environmentally friendly as costly & time consuming empty 205L drum disposal is no longer required
- 3:1 ratio pump facilitates flow rates of up to 18L/min
- Dual pedestal hose reel provides a long service life



STATIONARY OIL PUMP, REEL & METER KIT
454600N

- Includes a 3:1 ratio drum pump, 10m hose reel, electronic meter and a 2m pump to hose reel connection hose
- Adjustable flow rates of up to 10L/min
- 3:1 ratio pump suits 205L drums
- Dual pedestal hose reel withstands angular hose pull

- 454601 Also available with a preset meter
- 454599 Also available with on/off gun



SAMOA OIL CONTROL VALVE
363114

- Flow rates of up to 40L/min
- Maximum working pressure of 1,450psi (100bar)
- 1/2" BSP(f) inlet port & swivel
- Trigger lock helps to prevent accidental dispensing
- Compact ball bearing swivel with integrated oil filter ensures a long working life



5L OIL CONTAINER WITH 25MM POUR LID KIT
001014-25

- Fully sealed system reduces the chance of lubricant contamination
- Colour coding accurately identifies fluids to minimise cross contamination
- HDPE construction with UV & anti static resistant qualities

- 001014-PU Also available 5L container pump kit



SAMOA ELECTRONIC OIL METER
365534

- Electronically meters & totalises the amount of lubricant dispensed
- Maximum flow rate of 30L/min
- Fluid inlet is a 1/2" BSP(f) swivel
- Maximum operating pressure of 1,450psi (100bar)
- Control valve can be automatically locked as required
- Also suitable for use with ATF & antifreeze



3/4" AIR OPERATED DIAPHRAGM PUMP
ALE-20BAH

- Maximum flow rates of 100L/min
- 3/4" BSP(f) inlet/outlet
- Aluminium body & hytrel diaphragms
- Rugged bolted construction eliminates leaks & simplifies post maintenance reassembly
- Also suitable for the transfer of diesel fuel, gear oil, engine oil, antifreeze & waste water



S SERIES HOSE REELS



- Quality impact resistant UV stabilised covers for maximum durability
- Detachable steel mounting bracket enables 180° hose reel rotation
- Automatic & positive latching mechanism
- Adjustable hose stop for convenient lead length positioning



Product No.	Product Description	Hose Length	Hose ID	Working Pressure	Hose Material	Cover Colour	Hose Colour	Max. Working Temp.	Reel Inlet BSPT(m)	Hose Outlet BSPT(m)	Weight
SAW100	Air & Water Hose Reel	16m	10mm	300psi (20bar)	PVC	Red	BLUE	0°C~60°C	3/8"	3/8"	10kg
SAW200	Air & Water Hose Reel	13m	12mm	300psi (20bar)	PVC	Red	BLUE	0°C~60°C	3/4"	3/4"	10kg
SW500N	Water Hose Reel	18m	12mm	180psi (20bar)	Polyurethane	Blue	RED	-20°C~60°C	1/2"	1/2"	10kg
S01700	Oil Hose Reel	10m	12mm	2,000psi (20bar)	S.A.E. 100R1 Rubber	Black	BLACK	-30°C~100°C	1/2"	1/2"	15.6kg
SGRW510	Garden Water Hose Reel	16m	12mm	145psi (20bar)	PVC	Green	GREEN	0°C~60°C	3/4"	Nozzle	10kg

SAMOA 3/4" SPRING REWIND FUEL, OIL, AIR & WATER HOSE REEL 505224N



- Heavy duty full metal double pedestal construction
- Hose capacity 15m x 19mm ID
- Hose pressure rating 1,500psi (103bar)
- 3/4" BSP(f) inlet/outlet
- Seven position outlet arm



- **505232** Also available SAMOA Spring Rewind Hose Reel - 20m x 12mm ID

ALEMLUBE EL SERIES WATER HOSE REEL HR40050



- High quality impact & UV resistant polypropylene covers
- 3/4" BSP inlet/outlet
- Maximum working pressure of 300psi (20bar)
- Supplied complete with 20m x 12mm ID PVC hose & 1.2m lead in hose
- Can be wall or ceiling mounted



ALEMITE LARGE CAPACITY OIL AND FUEL HOSE REEL 8080-G



- Sealed spring cassette
- Suitable for use with air, water, oil & fuel
- Sealed & plated bearings
- 1,000psi (60bar) hose pressure rating
- Narrow width
- Easy and quick mounting
- Supplied complete with 15m x 1" ID hose



- **8080-F** Also available with 25m x 19mm ID hose

ALEMLUBE EL SERIES AIR, WATER & FUEL SPRING REWIND HOSE REEL HR90040



- Reinforced steel frame provides maximum strength & stability
- Includes 30m x 12mm ID rubber hose & hose stop

- **HR90040** 30m x 1/2" ID hose
- **HR90045** 25m x 1/2" ID hose
- **HR90025** 20m x 3/4" ID hose
- **HR90005** 30m x 1" ID hose
- **HR90015** 8m x 1" ID hose



ALEMLUBE EL SERIES HOT WATER HOSE REEL WITH NOZZLE HR30070C



- 3/8" BSP inlet/outlet
- 1/2" BSP(m) outlet
- Maximum working pressure of 300psi (20bar)
- Supplied complete with 20m x 10mm ID hybrid polymer hose & 1.9m lead in hose
- High quality impact & UV resistant polypropylene covers



1" MECHANICAL DIESEL FUEL METER 51008



- Accurate between flow rates of 20L/min & 120L/min
- Maximum working pressure of 142psi (10bar)
- 1" BSP(f) inlet/outlet ports
- Suitable for gravity feed or pump applications

- **51007** Also available 4-digit meter version

