

ROTARY ACTION DRUM PUMP 501A

- Suitable for the transfer of diesel, petrols, kerosene, lube oil & machine oil
- Delivery rates of up to 18L/min or 0.26L per rotation
- Length: 1,300mm (4.3ft)
- Delivery tube: 31.8mm (1") OD
- Includes 2.2m of farm tank hose, bung adaptor, rubber gasket, a four chamber rotor assembly, spout & spout holster



Alemlube

HEAVY DUTY HI-FLO REFUELLING DRUM PUMP 5060AN

- Delivery rates of 1.1 litres per rotation
- Supplied complete with 2.6m of UV & fuel resistant hose, spout, in built spout holster, 3-piece downtube, bung adaptor
- 3-piece downtube suits 60L & 205L drums and IBC's
- Suitable for the transfer of diesel fuel, petrol, light oils up to SAE30 & kerosene



Alemlube

1" AUTOMATIC DIESEL NOZZLE 51039

- Automatically cuts off when fuel tank is full
- Can operate with flow rates of up to 120L/min
- 1" BSP(f) swivel included
- Suitable for applications involving an electric diesel transfer pump
- **51039P** Also available but for petrol



Alemlube

IN LINE ELECTRONIC FUEL METER 407010N2

- Turbine type meter with aluminium body & polypropylene turbine
- Accurate flow rates of 20 to 120L/min
- Field calibration is possible
- Maximum operating pressure of 290psi (20 bar)
- 6-digit total from 1 to 999,999
- Also suitable for use with diesel, antifreeze & kerosene



Alemlube

LOCKABLE DIESEL REFUELLING STORAGE & DISPENSING KITS

- Flow rates of up to 50L/min
- Heavy duty, robustly constructed polyethylene tank
- Built in nozzle holster
- Unique user friendly design with lockable lid to aid fuel & dispensing kit security
- Dispensing kit consists of a 12V pump, 4m antistatic fuel delivery hose, 2m battery cables & automatic nozzle
- Recesses for tie down straps aid handling
- Forklift lift points
- Suitable for diesel fuel only

Product No.	Capacity	Flow Rate	Meter
L60040PAM	600L	50L/min	Yes
L60040PA	600L	50L/min	No
L45040PAM	450L	50L/min	Yes
L45040PA	450L	50L/min	No
L20040PAM	200L	50L/min	Yes
L20040PA	200L	50L/min	No
L10040PAM	100L	50L/min	Yes
L10040PA	100L	50L/min	No



Alemlube

1L BRAKE CLEANER SPRAYER 6603A

- Large filling opening
- Safety valve at 36psi (2.5bar) with depressurisation option
- Easy tool free maintenance
- Strong translucent bottle with level indicator
- Ergonomic design
- Not suitable for use with acids



Alemlube

20L GEAR OIL DRUM PUMP 8828N2

- Capable of delivering up to 110mL per stroke
- Ideal pump for the transfer of engine, gear, diff & hydraulic oils
- Drainback nozzle holster ensures that excess oil ends up back in the drum
- Drain back holster filter protects against foreign particle contamination
- **7710B** Also available suits 10L drum



Alemlube

1L MULTI PURPOSE TOP UP KIT
7701A


- Ideal for topping up difficult to access oiling points in the workshop & at home
- Suitable for all oils, automatic transmission fluids, brake fluids & some hand cleaners
- Not suitable for combustible fluids
- Self-contained unit prevents oil contamination when not in use
- Container capacity of 1L



ALEMLUBE 1L, 2L, 4L & 5L CONTAINER OIL PUMPS
7700 Series

- Suitable for use with hydraulic oil, engine oil, gear oil & transmission fluids

Product No.	Suits	mL / Stroke
7701B	1L container	6
7702B	2L container	6
7704C	4L container	6
7705B	5L container	6
7705C	5L container	6

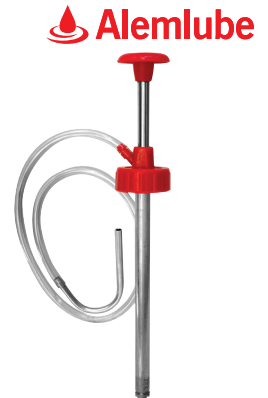

HEAVY DUTY 20L GEAR OIL DRUM PUMP
10028

- Heavy duty fully serviceable drum pump delivers 170mL on the downstroke
- Height adjustable bung adaptor & two extra adaptors to suit local and international 20L drums supplied standard
- Ideal for use with engine, hydraulic, gear, diff & synthetic oils
- Also suitable for underground coal mine use



SAMOA OIL TRANSFER KIT WITH METER
454110N

- 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & electronic resettable meter
- Flow rates of up to 12L/min
- Air pressure range from 20psi to 140psi
- Air consumption 180NL/min (6.4 cfm)
- Air inlet: 1/4" BSP(f)
- Fluid outlet: 1/2" BSP(f)

- 454111N Oil Transfer Kit with On/Off Gun



IBC OIL STORAGE & TRANSFER KIT
454697C


- Unit includes a 1,000L IBC container, 3:1 ratio pump, hose reel inclusive of 10m of hose, a side mounting bracket & an electronic oil meter
- Environmentally friendly as costly & time consuming empty 205L drum disposal is no longer required
- 3:1 ratio pump facilitates flow rates of up to 18L/min
- Dual pedestal hose reel provides a long service life



STATIONARY OIL PUMP, REEL & METER KIT
454600N

- Includes a 3:1 ratio drum pump, 10m hose reel, electronic meter and a 2m pump to hose reel connection hose
- Adjustable flow rates of up to 10L/min
- 3:1 ratio pump suits 205L drums
- Dual pedestal hose reel withstands angular hose pull

- 454601 Also available with a preset meter
- 454599 Also available with on/off gun

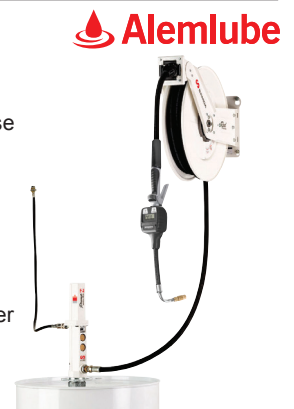

SAMOA OIL CONTROL VALVE
363114

- Flow rates of up to 40L/min
- Maximum working pressure of 1,450psi (100bar)
- 1/2" BSP(f) inlet port & swivel
- Trigger lock helps to prevent accidental dispensing
- Compact ball bearing swivel with integrated oil filter ensures a long working life



5L OIL CONTAINER WITH 25MM POUR LID KIT
001014-25

- Fully sealed system reduces the chance of lubricant contamination
- Colour coding accurately identifies fluids to minimise cross contamination
- HDPE construction with UV & anti static resistant qualities

- 001014-PU Also available 5L container pump kit



SAMOA ELECTRONIC OIL METER
365534

- Electronically meters & totalises the amount of lubricant dispensed
- Maximum flow rate of 30L/min
- Fluid inlet is a 1/2" BSP(f) swivel
- Maximum operating pressure of 1,450psi (100bar)
- Control valve can be automatically locked as required
- Also suitable for use with ATF & antifreeze



3/4" AIR OPERATED DIAPHRAGM PUMP
ALE-20BAH

- Maximum flow rates of 100L/min
- 3/4" BSP(f) inlet/outlet
- Aluminium body & hytrel diaphragms
- Rugged bolted construction eliminates leaks & simplifies post maintenance reassembly
- Also suitable for the transfer of diesel fuel, gear oil, engine oil, antifreeze & waste water



12V DIESEL REFUELLING TANK KIT
52000



- Flow rates of up to 50L/min
- Includes 4m of antistatic fuel delivery hose, 2m of battery cable, a stainless steel & brass fuel filter and a manual nozzle
- Maximum head capacity of 15m
- Suction capacity of up to 2m

- 52001 as above but 24V



HIGH VOLUME DIESEL FUEL TRANSFER PUMP
326000



- Flow rates of up to 100L/min
- Vane type pump with sintered steel rotor and acetylic resin vanes
- 1" BSP inlet/outlet
- 240V continuous running operation
- Thermal motor overload protection
- Sturdy cast iron construction
- Suitable for the transfer of diesel fuel



12V HIGH VOLUME AUTO DIESEL PUMP
52004A



- Flow rates of up to 80L/min
- Telescopic down tube suits fuel tanks up to 1,000mm deep
- Includes an automatic shut off nozzle
- Total maximum discharge lift capacity of 10m
- 1" BSP(f) inlet/outlet
- Suitable for diesel fuel transfer only



12V PETROL & AVGAS DRUM PUMP
372010



- Suitable for the transfers of ULP, Avgas, E10, diesel & kerosene
- Automatic nozzle with flow rates of up to 50L/min
- Inbuilt nozzle holster
- 4m long antistatic fuel hose
- Fully-flanged components: pump, flow meter & filters easily fitted or replaced



FUEL TANK FILTER
FA2



- Fuel filter suitable for use with gravity feed fuel tanks & with hand, air or electric drum pumps
- Features a 10 micron fuel filter element, a drain cock & a replaceable clear plastic bowl
- 1" BSP(f) inlet/outlet
- Replacement elements readily available



20LTR PETROL CONTAINER
29106



- AS/NZS 2906 approved
- Flexible vented spout for accessing hard to reach areas
- Dual pour for quick filling
- Accelerated flow by opening opposite cap
- Australian made
- 20ltr pour fast
- Is a non corrosive container



20LTR DIESEL CONTAINER
29107



- AS/NZS 2906 approved
- Flexible vented spout for accessing hard to reach areas
- Dual pour for quick filling
- Accelerated flow by opening opposite cap
- Australian made
- 20ltr pour fast
- Is a non corrosive container



5LTR PLASTIC PRESSURE PACK SPRAYER
11272



- Manual pump action to pressurise.
- Has a release valve to release pressure.
- Lockable trigger for continuous spraying.
- Wide mouth for easy filling.
- Viton seals



FUNNEL SET - 3 PCE
29111



- Stacks for easy storage
- Lightweight and durable
- Diameters: 150mm, 200mm and 250mm
- 30mm – 35mm High side wall for fluid stability
- Wide opening for quick filling
- Made from strong polypropylene material
- Suitable for fuel, oils, coolants and other liquids



SELF-PRIMING INOX SERIES MULTISTAGE PUMP & Controller CLA INOX240A (807724)



3
YEAR
WARRANTY

Max Flow Rate (L/min): 100
Max Head (m): 48
Power Absorbed (w) P2: 750
Max Suction Lift (m): 4
Inlet Size (mm): 25
Outlet Size (mm): 25
Weight (kg): 12



SUBMERSIBLE LIGHT CONSTRUCTION PUMP WITH FLOAT CLA BLUESUB10 (808366)



1
YEAR
WARRANTY

HP: 1
kPa: 180
Kilo Watts: 0.75
Max Head (m): 18
Port Size Outlet (BSPF): 2"
Particle Size (mm): 10
Volts: 240



9M 250 WATT HEAD DRAINAGE PUMP CLA PROSUB C9 (807695)



3
YEAR
WARRANTY

Max Flow Rate (L/min): 195
Max Head (m): 9
Power Absorbed (w) P2: 250
Max Solids Handling (mm): 5
Outlet Size (mm): 32
Pump Diameter (mm): 215
Height (mm): 320
Cable Length (m): 10
Weight (kg): 4



SUBMERSIBLE IN TANK PRESSURE PUMP CLA DIVERTRON C6 (807685)



3
YEAR
WARRANTY

Max Flow Rate (L/min): 95
Max Head (m): 36
Power Absorbed (w) P2: 650
Outlet Size (mm): 25
Weight (kg): 10



ECOVRT7 SUBMERSIBLE DRAINAGE PUMP CLA ECOVRT 7 (807699)



3
YEAR
WARRANTY

Power Absorbed (w): 180
Max Head (m): 7
Pump Max Flow Rate (L/min): 135
Pump Outlet Size: 1 1/4"
Cable Length (m): 10
Max Solids Handling (mm): 15



HEAVY DUTY SUBMERSIBLE PUMP WITH FLOAT **DAB** DAB FEKAVS750MA (701560)



2
YEAR
WARRANTY

Suitable For: Dirty Water
Flow Rate (L/min): 400
HP: 1
Kilo Watts: 0.75
Max Head (m): 9.6
Port Size Outlet: 2" BSPF
Particle Size (mm): 50 mm



ENGINE DRIVE PUMPS



WATER TRANSFER & TRASH PUMPS

Full range of 1" to 6" Water Transfer and trash pumps available with petrol and diesel options for the entire range.



HIGH PRESSURE FIRE PUMPS

Full range of 1" to 3" High Pressure Fire Pumps available with petrol and diesel options for the entire range.



HIGH PRESSURE FIRE TANKS & SYSTEMS

Extensive range of water tanks and complete fire systems that can be tailored to your requirements.



PUMPS BN228



- Standard flexshaft
 - Aluminium pump body for improved portability
 - 3 Dog drive coupling
 - 6m flexshaft available
- APPLICATIONS
- Excavations pits
 - Construction sites
 - Pier holes
 - Dams



SINGLE IMPELLER ENGINE DRIVEN FIRE PUMP CLA HP15ABS (808368)



Suitable For: Fire Fighting
Fuel: Petrol
Hp: 6.5
Max Flow (L/min): 330
Max Head (m): 55
Port Size Outlet: 1 x 1-1/2" +
2 x 1" BSPM



TWIN IMPELLER ENGINE DRIVEN FIRE PUMP CLA 2HP15ABS (808369)



Suitable For: Fire Fighting
Fuel: Petrol
HP: 6.5
Max Flow (L/min): 300
Max Head (m): 80
Port Size Outlet: 1 x 1-1/2" +
2 x 1" BSPM



ENGINE DRIVEN TRANSFER PUMP CLA WP15 (808367)



Suitable For: Water Transfer
Fuel: Petrol
HP: 3.0
Max Flow (L/min): 300
Max Head (m): 25
Port Size Outlet: 1-1/2" BSPM



ENGINE DRIVEN FIRE PUMP POWERED BY HONDA GX160 BIA-MH15SHP (809993)



Suitable For: Water Transfer
Fuel: Petrol
Hp: 4.8
Max Flow (L/min): 390
Max Head (m): 74.5
Port Size Outlet: 1 x 1-1/2" +
2 x 1" BSPM

