

1L MULTI PURPOSE TOP UP KIT
7701A


- Ideal for topping up difficult to access oiling points in the workshop & at home
- Suitable for all oils, automatic transmission fluids, brake fluids & some hand cleaners
- Not suitable for combustible fluids
- Self-contained unit prevents oil contamination when not in use
- Container capacity of 1L



ALEMLUBE 1L, 2L, 4L & 5L CONTAINER OIL PUMPS
7700 Series

- Suitable for use with hydraulic oil, engine oil, gear oil & transmission fluids

Product No.	Suits	mL / Stroke
7701B	1L container	6
7702B	2L container	6
7704C	4L container	6
7705B	5L container	6
7705C	5L container	6

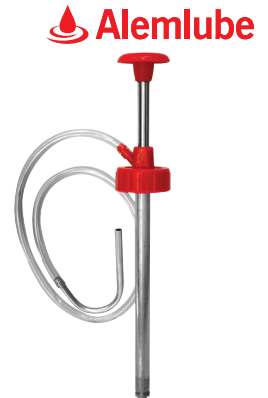

HEAVY DUTY 20L GEAR OIL DRUM PUMP
10028

- Heavy duty fully serviceable drum pump delivers 170mL on the downstroke
- Height adjustable bung adaptor & two extra adaptors to suit local and international 20L drums supplied standard
- Ideal for use with engine, hydraulic, gear, diff & synthetic oils
- Also suitable for underground coal mine use



SAMOA OIL TRANSFER KIT WITH METER
454110N

- 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & electronic resettable meter
- Flow rates of up to 12L/min
- Air pressure range from 20psi to 140psi
- Air consumption 180NL/min (6.4 cfm)
- Air inlet: 1/4" BSP(f)
- Fluid outlet: 1/2" BSP(f)

- 454111N Oil Transfer Kit with On/Off Gun



IBC OIL STORAGE & TRANSFER KIT
454697C

- Unit includes a 1,000L IBC container, 3:1 ratio pump, hose reel inclusive of 10m of hose, a side mounting bracket & an electronic oil meter
- Environmentally friendly as costly & time consuming empty 205L drum disposal is no longer required
- 3:1 ratio pump facilitates flow rates of up to 18L/min
- Dual pedestal hose reel provides a long service life



STATIONARY OIL PUMP, REEL & METER KIT
454600N

- Includes a 3:1 ratio drum pump, 10m hose reel, electronic meter and a 2m pump to hose reel connection hose
- Adjustable flow rates of up to 10L/min
- 3:1 ratio pump suits 205L drums
- Dual pedestal hose reel withstands angular hose pull

- 454601 Also available with a preset meter
- 454599 Also available with on/off gun



SAMOA OIL CONTROL VALVE
363114

- Flow rates of up to 40L/min
- Maximum working pressure of 1,450psi (100bar)
- 1/2" BSP(f) inlet port & swivel
- Trigger lock helps to prevent accidental dispensing
- Compact ball bearing swivel with integrated oil filter ensures a long working life



5L OIL CONTAINER WITH 25MM POUR LID KIT
001014-25

- Fully sealed system reduces the chance of lubricant contamination
- Colour coding accurately identifies fluids to minimise cross contamination
- HDPE construction with UV & anti static resistant qualities

- 001014-PU Also available 5L container pump kit



SAMOA ELECTRONIC OIL METER
365534

- Electronically meters & totalises the amount of lubricant dispensed
- Maximum flow rate of 30L/min
- Fluid inlet is a 1/2" BSP(f) swivel
- Maximum operating pressure of 1,450psi (100bar)
- Control valve can be automatically locked as required
- Also suitable for use with ATF & antifreeze



3/4" AIR OPERATED DIAPHRAGM PUMP
ALE-20BAH

- Maximum flow rates of 100L/min
- 3/4" BSP(f) inlet/outlet
- Aluminium body & hytrel diaphragms
- Rugged bolted construction eliminates leaks & simplifies post maintenance reassembly
- Also suitable for the transfer of diesel fuel, gear oil, engine oil, antifreeze & waste water



12V DIESEL REFUELLING TANK KIT
52000



- Flow rates of up to 50L/min
- Includes 4m of antistatic fuel delivery hose, 2m of battery cable, a stainless steel & brass fuel filter and a manual nozzle
- Maximum head capacity of 15m
- Suction capacity of up to 2m

- 52001 as above but 24V



HIGH VOLUME DIESEL FUEL TRANSFER PUMP
326000



- Flow rates of up to 100L/min
- Vane type pump with sintered steel rotor and acetylic resin vanes
- 1" BSP inlet/outlet
- 240V continuous running operation
- Thermal motor overload protection
- Sturdy cast iron construction
- Suitable for the transfer of diesel fuel



12V HIGH VOLUME AUTO DIESEL PUMP
52004A



- Flow rates of up to 80L/min
- Telescopic down tube suits fuel tanks up to 1,000mm deep
- Includes an automatic shut off nozzle
- Total maximum discharge lift capacity of 10m
- 1" BSP(f) inlet/outlet
- Suitable for diesel fuel transfer only



12V PETROL & AVGAS DRUM PUMP
372010



- Suitable for the transfers of ULP, Avgas, E10, diesel & kerosene
- Automatic nozzle with flow rates of up to 50L/min
- Inbuilt nozzle holster
- 4m long antistatic fuel hose
- Fully-flanged components: pump, flow meter & filters easily fitted or replaced



FUEL TANK FILTER
FA2



- Fuel filter suitable for use with gravity feed fuel tanks & with hand, air or electric drum pumps
- Features a 10 micron fuel filter element, a drain cock & a replaceable clear plastic bowl
- 1" BSP(f) inlet/outlet
- Replacement elements readily available



20LTR PETROL CONTAINER
29106



- AS/NZS 2906 approved
- Flexible vented spout for accessing hard to reach areas
- Dual pour for quick filling
- Accelerated flow by opening opposite cap
- Australian made
- 20ltr pour fast
- Is a non corrosive container



20LTR DIESEL CONTAINER
29107



- AS/NZS 2906 approved
- Flexible vented spout for accessing hard to reach areas
- Dual pour for quick filling
- Accelerated flow by opening opposite cap
- Australian made
- 20ltr pour fast
- Is a non corrosive container



5LTR PLASTIC PRESSURE PACK SPRAYER
11272



- Manual pump action to pressurise.
- Has a release valve to release pressure.
- Lockable trigger for continuous spraying.
- Wide mouth for easy filling.
- Viton seals



FUNNEL SET - 3 PCE
29111



- Stacks for easy storage
- Lightweight and durable
- Diameters: 150mm, 200mm and 250mm
- 30mm – 35mm High side wall for fluid stability
- Wide opening for quick filling
- Made from strong polypropylene material
- Suitable for fuel, oils, coolants and other liquids

