


MEASURING TOOLS

For measuring gauge and length of wood, self tapping metal thread screws, bolts, wall plugs and drill sizes.

suttontools

Description	Item #
Ezi Sizer Gauge	M810 0110
Multi Function Gauge - Metric & Imperial	M810 0650

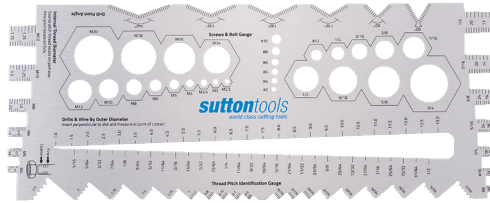

M810 0110



M810 0650

PRECISION ENGINEERING TOOLS.

FN WORKSHOP



267SR1006



267MTQ206



267MTQ306



267MTQ106



267AP1125



267QM0550



267CS3030

Description	Size	Item #
Engineer Rulers		
Precision Engineer Ruler	150mm	267MS1015
Precision Engineer Ruler	300mm	267MS1030
Precision Engineer Ruler	600mm	267MS1060
Precision Engineer Ruler	1000mm	267MS1100
Engineer Squares		
Precision Engineer Square	100mm	267SR1004
Precision Engineer Square	150mm	267SR1006
Precision Engineer Square	200mm	267SR1008
Precision Engineer Square Graduated	100mm	267SG1004
Precision Engineer Square Graduated	150mm	267SG1006
Precision Engineer Square Graduated	200mm	267SG1008
Carpenters Squares		
300mm Body x 200mm Tongue, Metric & Inch	300mm	267901250
600mm Body x 400mm Tongue, Metric & Inch	600mm	267901600
Alloy Squares		
Metric Aluminium Alloy Square	180mm	267900180
Imperial Aluminium Alloy Square	7"	267900175
Engineers Scribes		
Engineers Scriber Double End 90° Bend Point	270mm	267M06020
Engineers Scriber Tungsten Tip	150mm	267M06041
Calipers		
Inside Caliper	150mm	267MTQ306
Inside Caliper	200mm	267MTQ308
Outside Caliper	150mm	267MTQ206
Outside Caliper	200mm	267MTQ208
Spring Dividers		
Spring Divider	100mm	267MTQ104
Spring Divider	150mm	267MTQ106
Spring Divider	200mm	267MTQ108
Miscellaneous		
Centre Punch Auto Brass	125mm	267AP1125
Quick Change Magnetic Pick-Up Set		267QM0550
Combination Square 3 in 1	300mm	267CS3030
Template Tool	250mm	267902250



267900180



267900175



267902250


SINGLE SIDED RULES - METRIC



- Manufactured from stainless steel
- Made in Japan to JIS B7516 standard

Material Number	Length (mm)	Graduations (mm)	
		Upper Edge	Lower Edge
150BM	150	1	0.5
300M	300	1	0.5
600M	600	1	0.5
1000M	1000	1	0.5
1500M	1500	0-100: 0.5, 100-1500:1	1
2000M	2000	0-100: 0.5, 100-2000:1	1
3000M	3000	0-100: 0.5, 100-3000:1	1
4000M	4000	0-100: 0.5, 100-4000:1	1

DOUBLE SIDED RULES - METRIC



Metric Front



Metric Back

- Numerical markings on reverse side in centre beginning in middle and counting outwards to each end
- Manufactured from stainless steel
- Made in Japan to JIS B7516 standard

Material Number	Length (mm)	Graduations (mm)	
		Upper Edge	Lower Edge
150SP	150	1	0.5
300SP	300	1	0.5

DOUBLE SIDED RULES - METRIC & IMPERIAL



Metric Front



Imperial Back

- Metric Front - numerical markings every 10mm in centre only
- Imperial Back - numerical markings every 1 inch in centre only
- Manufactured from stainless steel
- Made in Japan to JIS B7516 standard

Material Number	Length
150B6	150mm (6")
30012	300mm (12")
60024	600mm (24")
100036	1000mm (36")

ALUMINIUM CUTTING RULES - METRIC



- Inbuilt handle provides ease of use and maximum safety when cutting
- Lightweight aluminium construction
- Handy for all drafting and marking out applications on walls, ceilings and floors

Material Number	Length
322001	500mm
322002	600mm
322003	800mm
322004	1000mm
322005	1200mm

DUAL SCALE STAINLESS RULERS



Product Code Range

AC-990-006-11 150mm

AC-990-012-11 300mm



Graduations: 0.5mm, 1mm, 1/64", 1/32", 1/16"

STRAIGHT EDGE RULER



- Made of hardened steel, chrome plated.


Product Code Range Size Straightness

AC-991-012-01 300mm 320L x 40W x 5Tmm 0.02 mm

AC-991-020-01 500mm 520L x 40W x 5Tmm 0.03 mm

AC-991-040-01 1000mm 1020L x 50W x 5Tmm 0.04 mm

150mm/6" STAINLESS STEEL RULE LSR150

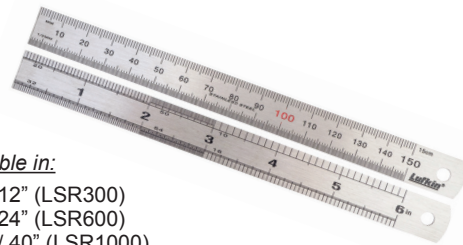

Also available in:

- 300mm / 12" (LSR300)
- 600mm / 24" (LSR600)
- 1000mm / 40" (LSR1000)

1M PLASTIC FOLDING RULE 35-444



- Millimetre graduations, 5mm figured every 10mm on both sides
- Made from super tough engineering plastic
- One straight and one bevelled edge

TAPE MEASURE 28908



- 8m metric
- Size: 8m x 25mm
- High-impact ABS case
- Co-molded rubber case for comfortable grip and durability
- Heat-treated spring provides long life and smooth blade rewind
- 0.11mm thick tylon coated blade



FATMAX 8M TAPE
33-732

STANLEY

- 32mm wide blade delivers 3.3m stand out
- Mylar Polyester coated blade extends blade life
- Blade Armor™ coating on initial section of blade
- High impact case with rubber overmold is both comfortable and jobsite tough



FATMAX 10M/33' TAPE
33-832

STANLEY

- 32mm wide blade delivers 3.3m stand out
- Mylar Polyester coated blade extends blade life
- Blade Armor™ coating on initial section of blade
- High impact case with rubber overmold is both comfortable and jobsite tough



FATMAX PRO 8M TAPE
33-894

STANLEY

- 32mm wide blade delivers 4m stand out - the longest in the industry
- Mylar Polyester coated blade extends blade life
- Blade Armor™ coating on initial section of blade
- High impact chrome plated case with rubber overmold



FATMAX 8M MAGNETIC TAPE
FMHT33869

STANLEY

- 32mm wide blade delivers 3.3m stand out
- Mylar Polyester coated blade extends blade life
- Blade Armor™ coating on initial section of blade
- High impact case with rubber overmold is both comfortable and jobsite tough



ULTIMATE 8m X 25mm TAPE MEASURE
UW148MN

Crescent Lufkin

- Strong ABS plastic case
- Positive non-slip blade lock
- Sliding end hook, automatically adjusts to inside and outside measurements

Also available in:
- 8m / 26' (UW148MEN)



GENERAL TAPE MEASURES

Milwaukee

Product Code	Description
4822506C	Keychain Tape Measure 2m/6ft
48226708	Compact Tape Measure 8m

COMPACT MAGNETIC TAPES

Milwaukee



Product Code	Description
48220505	Compact Magnetic Tape Measure 5m
48220508	Compact Magnetic Tape Measure 8m
48220526	Compact Magtc Tape Measure 8m/26ft
48220510	Compact Magnetic Tape Measure 10m

WIDE BLADE TAPES

Milwaukee



Product Code	Description
48220208	Wide Blade Tape Measure 8m
48229108	Gen 2 STUD™ Tape Measure 8m
48229108M	Magnetic STUD™ Tape Measure 8m

SHOCKFORCE NITE EYE™ TAPE MEASURE 8m X 30mm
NE830M

Crescent Lufkin

- Diamond-coated end hook grabs material from every direction and prevents slippage
- Full 4 meters of stand out

Also available in:
- 3m (NE313M)
- 5m (NE530M)
- 10m (NE1030M)



TRADE MX 8m X 25mm TAPE MEASURE
TM48MN

Crescent Lufkin

- Non-slip Co-Moulded rubber grip
- Ergonomically designed case fits comfortably in the hand
- Durable 4-rivet end hook

Also available in:
- 8m / 26' (TM48MEN)
- 10m (TM410MN)
- 10m / 33' (TM410MEN)



TAPE MEASURE EASYREAD 8M X 25MM

Code: TMXE8025

- Easyread blade marking on both sides of the tape
- Layered nylon blade for maximum durability



ultimax


YAMAYO TAPES



Designed to handle all weather conditions and rough handling on a construction site, Yamayo tapes are made to last.



Fibreglass Tapes
OTR30X
OTR50X
OTR100X



Nylon-coated Steel
ZNX30M
ZNX50M
ZNX100M

POCKET TAPES BM300 and BM100

- High impact resistance thanks to PC/ABS housing with shock-absorbent soft grip casing.
- Extremely hard-wearing STABILA NYLON-WRAP blade coating.
- Double-sided scale for optimum readability.
- STABILA SPIKES hook for improved protection against slipping.
- High-quality belt clip for convenient attachment.



STABILA

Part No.	Model	Size	Easy Clip	Accuracy Class	Double-Sided scale
19566	BM 100	5mx19mm		EC Class II	
19579	BM 100	8mx25mm		EC Class II	
19572	BM 300	8mx27mm	Yes	EC Class II	yes

LONG TAPES LBM 2000 and LBM 1000

- Closed case and open reel tapes equipped with a manual crank to retract the tape measure.
- Rolled into an enclosed casing or an open frame to store it securely and transport it safely after use.
- Steel measuring tapes are more accurate, while fibreglass tapes have practical advantages when there is a risk of heavy soiling and humidity or when used in the vicinity of electrical wires that are not insulated.



STABILA

Part No.	Model	Size	Reel	Blade Material	Accuracy Class
19664	LBM 1000	30m	Open Y-Frame	Steel	EC Class II
19667	LBM 1000	50m	Open Y-Frame	Steel	EC Class II
19653	LBM 1000	100m	Open Y-Frame	Steel	EC Class II
19662	LBM 1000	30m	Open Y-Frame	Fibreglass	EC Class III
19663	LBM 1000	50m	Open Y-Frame	Fibreglass	EC Class III
19658	LBM 2000	20m	Closed	Steel	EC Class II
19661	LBM 2000	30m	Closed	Steel	EC Class II
19654	LBM 2000	20m	Closed	Fibreglass	EC Class III
19655	LBM 2000	30m	Closed	Fibreglass	EC Class III

OPEN REEL STEEL TAPES

Features

- Fast 2 x rewind
- Cushion end for soft rewind
- Metric top side, imperial bottom side
- Heavy duty polyamid ribbon
- Easy grip Z handle



imex
accurate for life

3 SPEED WINDER FIBREGLASS TAPE MEASURE 30M X 20MM

Code: XBA3020

- 20mm extra wide reinforced fibreglass tape
- Strong reinforced end hook with magnetic loop & true zero claw



Sterling

**3X
SPEED
WINDER**

30m/100' X 13mm LONG FIBREGLASS TAPE MEASURE FE30CME

**CRESCENT
Lufkin**

Also available in:

- 60m / 200' (FE60CME)
- 90m / 300' (FE90CME)



LONG TAPES



Product Code	Description
48225330	Fibreglass Open Reel Long Tape 30m/100ft
48225310	Fibreglass Open Reel Long Tape 100m/330ft
48225203	Open Reel Long Tape 30m
48225103	Closed Reel Long Tape 30m
48225211	Open Reel Long Tape 100m/330ft

**320MM MEASURING WHEEL
SIDE COUNTER
PSMW48MB**



- Heavy duty wheel wiper prevents debris buildup
- Easy-read non-glare counter
- Range counter to 9999.9

**ROTO-SURE MEASURING WHEELS
RCLA-P/ROTO24**



The measuring wheel of choice for contractors, Rotosure are tough, accurate and easy to operate. The Roto-Sure includes 2 years warranty across the range.



IMEX MEASURING WHEELS



Our comprehensive range of measuring wheels lets you choose the right wheel for the task. From lightweight to full steel construction, folded frame and up to 10,000 metre range.
003-R0500 - 1/2 size wheel
003-R1000 - Standard wheel
003-R1000D - Digital model



MEASURING WHEELS



Product Code	Description
48225016	Measuring Wheel 150mm (6")
48225032	Measuring Wheel w Bag 305mm (12")

LASER DISTANCE METERS



Functions: Distance, Area, Volume, Indirect distance, Maximum & Minimum

- Laser Sight
- Built-in Spirit Level
- IP54 Protection Level
- Back-light LCD Display
- Battery Power Indicator
- 1/4"-20 UNC Tripod Mount



Accuracy: 1.5 mm
Units: Metre/Inch/Foot
Light spot: Ø8 mm @ 40 m
Memory: 20 data points
Power supply:
2 x 1.5V AAA batteries

Product Code	Range
AC-TM40	40 m
AC-TM100	100 m

**LASER DISTANCE MEASURERS
ISO 16331-1 compliant**



- Fast, accurate and easy to use
- 4 to 18 measuring functions
- Protective rubber casing
- Accuracy & Range ISO guaranteed
- Batteries included



Part No.	Range	B/tooth®	Accuracy	Type
LD220	30m	-	+/-3mm	LCD IP54
LD320	40/50m	-	+/-2mm	LCD IP40
LD250BT	50m	Yes	+/-2mm	LCD IP54
LD520	200m	Yes	+/-1mm	Colour 4 x zoom IP54

**IMEX BULLSEYE 30/80
008-10BE30/008-10BE80**



Bullseye 30: A small economical laser distance measurer ideally suited to all internal trades.

- 30m range
- Fast 7 x speed measuring
- Accuracy ± 2.0mm

Bullseye 80: A high accuracy robust laser measurer for all trades

- 80m range
- 99 measurement recall
- Accuracy ± 1.5mm



LASER DISTANCE MEASURER



Product Code	Description
4933459276	Laser Distance Measurer 30m
4933459277	Laser Distance Measurer 45m
4933459278	Laser Distance Measurer 100m

WINDOW TINT METER AC-WTM2000



ACCUD

- Accurate under all lighting conditions
- Roadworthy compliant
- Magnetised sensor heads
- Large LCD display
- Durable carry case
- Includes calibration slide

Max. Sample Thickness: 18mm
Wavelength: 550 Nanometers
Resolution: 0.1%
Accuracy: 2%

IMEX IR650 THERMOMETER 013-IR650



- Features
- -50° to 650°C
 - Measure + C° or F°
 - Easy grip, light weight
 - Laser target pointer
 - 10 measurement recall



DIGITAL SOUND LEVEL METER AC-SLM130

Measuring range: 30-130dB
Accuracy: 1.5dB
Resolution: 0.1dB
Power supply: 9V battery
Dimension: 143x56x35 mm
Weight: 64g



ACCUD

- Fast & Slow display functions,
- Continuous & Min/Max functions
- Back-lit LCD
- Programmable Exceedence Alarm

DUAL LASER INFRARED THERMOMETER A-IR5



- Dual-laser targeting
- 2:1 distance to spot ratio
- Measurement Range: -30°C to 400°C
- Max/Min/Avg/Diff
- High/Low Alarm
- Backlit display
- 2m drop protection



PORTABLE HARDNESS TESTER AC-HL350



ACCUD

- Average value calculation function
- Conforms to ASTM A956-02 standard
- Durable carry case

Resolution: 1HLD, 1HV, 1HB, 0.1HRC, 0.1HRB, 1HS & 1MPa
Accuracy:
±8HLD / 0.8HRC (HLD=800)
Power Supply: 3xAAA batteries
Included: Test block, Small Support Ring, Brush & USB cable.

Min. sample weight:
>5 kg (directly),
>2kg (on solid support),
>0.1kg (coupled to solid support)
Min. sample thickness: >5 mm
Min. sample diameter: >22 mm
Max. surface roughness: Ra<1.6µm

INFRARED THERMOMETER AC-IT700

ACCUD



- Adjustable Emission Compensation
- Mutable sample capture alarm
- Battery Power Indicator
- Back-light LCD Display
- 1/4"-20 UNC Tripod Mount
- Laser Sight
- Functions: Min/Max. & Average
- Differential indication, High & Low Temp. Alarm & 100 Sample Point Memory

Range: -50°C to 950°C °C
Accuracy: 1.5% or 1.5 °C
Repeatability: 0.5 °C or 1%
Distance spot ratio: 12:1
Response time: 500 ms

Resolution: 0.1 °C
Power supply: 9V battery
Emissivity: 0.1-1.00 adjustable
Weight: 196 g

MOISTURE METER AC-WMM700

Moisture Measuring Range:
2-40%/50%/60%/70% (for different wood)
Moisture Accuracy: ±1%+0.5
Moisture Resolution: 0.5%
Temperature Measuring Range: -10°C-60°C
Temperature Accuracy: ±1%
Temperature Resolution: 0.1°C
Humidity Measuring Range: 20%RH-95%RH
Humidity Accuracy: ±5%RH
Humidity Resolution: 0.1%RH

ACCUD



25 MM DIGITAL DEPTH VERNIER AC-176-001-11

ACCUD

Range: 0-25 mm
Resolution: 0.01 mm
Accuracy: ±0.03 mm

- Measure the depth of grooves, small holes and tire thread
- Functions: zero point, mm/inch
- USB data output
- Made of stainless steel

150MM METRIC DEPTH MICROMETER AC-391-006-01

Range: 0-150mm
Accuracy: ±3 µm
Rod accuracy: ±(2+L/75) µm,
Base Span: 101.5 mm
Base Width: 17 mm

ACCUD

- Includes extension rods
- Ratchet stop

