

## TRIGGER ACTION GREASE GUN 660AN



- Grease pressures of up to 8,500psi (586bar)
- Delivers up to 1.1g of grease per stroke
- 450g capacity
- 4 jaw coupler & flexible 30cm long extension
- The ultimate greasing tool



## ALEMLUBE EL SERIES TRIGGER ACTION GREASE GUN G10010N



- Grease pressures of up to 4,000psi (276bar)
- Delivery rates of up to 1.15g per stroke
- Robust die cast aluminium head assembly
- Heavy duty 4 jaw coupler
- Exceptional value for money for cost conscious customers



## LEVER ACTION GREASE GUN 600A



- Grease pressures of up to 12,000psi (828bar)
- Delivers up to 1.6g of grease per stroke
- 450g capacity
- Suitable for all grease grades up to NLGI3
- Ever-Flow System enables the use of thick/tacky greases
- 4 jaw coupler & rigid extension



## ALEMLUBE EL SERIES LEVER ACTION GREASE GUN G10020N



- Grease pressures of up to 8,000psi (552bar)
- Delivery rates of up to 0.95g per stroke
- Robust die cast head assembly
- Heavy duty 4 jaw coupler
- Ideal for seasonal or intermittent use



## AIR OPERATED GREASE GUN 680AN



- Develops grease pressures of up to 3,290psi (226bar)
- Pressure ratio of 40:1
- Delivers up to 182g per minute
- Recommended maximum air pressure of up to 98psi (6bar)
- Suitable for use with grease up to NLGI2
- Flexible extension length of 50cm



## GREASE GUNS - HEAVY DUTY 450G



- 305221 - Pistol grease gun with 100mm steel extension, 300mm flexible hose and 4 jaw coupler
- 305219 - Lever action grease gun with 150mm steel extension and 4 jaw coupler



Material Number	Cartridge Capacity	Bulk Capacity	Output	Pressure
305221	450g	650cm <sup>3</sup>	0.5g per stroke	34,500 kPa
305219	450g	650cm <sup>3</sup>	1g per stroke	69,000 kPa

## 20V LITHIUM-ION CORDLESS GREASE GUN 630A



- Grease pressures of up to 7,250psi/500bar
- Adjustable delivery rates of 100g/min or 160g/min
- Able to dispense up to 16 cartridges before battery recharge is required (free flow)
- **430A** Also available 400g



## ALEMLUBE EL SERIES 18V LITHIUM-ION CORDLESS GREASE GUN G10040N



- Generates grease pressures of up to 10,000psi (690bar)
- Delivers up to 80g/min
- Spare battery, recharger, 106cm long grease gun flex & plastic moulded carry case supplied standard
- Supplied with two batteries, 3,000 mAh & 1,500 mAh



## 2.5KG GREASE KIT 6336



- Grease pressures of up to 10,000psi (690bar)
- Foot operated design leaves hands free to access difficult to access lube points
- Up to 30 shots before the hand piece needs to be reloaded with grease
- 360° swivel eliminates annoying hose tangling



## SAMOA 20KG GREASE KIT WITH TROLLEY 424150




- High pressure 55:1 ratio pump
- Up to 7,950psi (548bar) grease pressure
- The heavy duty air motor is free of external plastic components
- Built in filter protects against pump tube contamination
- Drum not included

- **424170** Also available without trolley



**24V 20KG GREASE KIT**  
*KPL-24EX*

- A unique product, this 24V, 20kg grease pump kit is ideal for mining & heavy industrial applications
- Suitable for grease up to NLGI2
- Working pressure of 4,000psi (276bar)
- Dispenses up to 70-80g/min
- Suitable for working temperatures of -10°C to +40°C
- Continuous operation

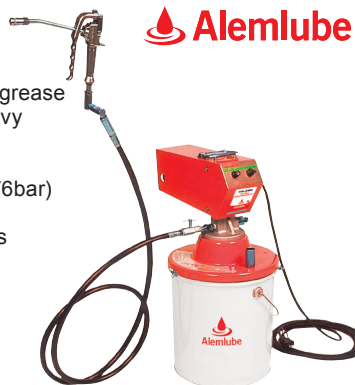

**SAMOA GREASE CONTROL VALVE WITH RIGID EXTENSION & Z-SWIVEL**  
*413080*

- Genuine high pressure performance reduces operator hand fatigue
- Maximum working pressure of 7,150psi (500bar)
- Single shot or continuous flow option
- Rigid outlet with 3 jaw coupler
- 1/4" BSP(f) inlet thread
- 1/8" BSP(f) outlet thread



**AGRICULTURAL GREASE NIPPLE ASSORTMENT KIT**  
*L4674*

- Includes 120 popular agricultural grease nipples
- All grease nipples included in the kit are case hardened, fully chromated, zinc passivated, batch tested to 8,000psi (552bar) & conform to international standards



- **L4675** 101 piece industrial grease nipple kit
- **L4676** 100 piece metric grease nipple kit

**SAMOA 180KG GREASE TRANSFER PUMP**  
*531010*

- 10:1 ratio double acting grease pump
- Maximum free flow of 34kg/min
- Develops grease pressures of up to 1,000psi (70bar)
- 1/2" BSP(f) air inlet, 1" BSP(f) grease outlet
- Flow rates of up to 10kg/min at (60-70 cpm)
- Total pump height of 1,427mm (pump tube height of 925mm)



**QUICK RELEASE GREASE GUN COUPLER**  
*14512*

- Works with all grease gun types
  - pneumatic, manual & battery
  - 1/8" BSP(f) thread
  - Maximum working pressure of 10,000psi (690 bar)
  - 90mm long



- **14511** Also available 1/8" NPT(f) thread

**SUPER LUBE MULTI-PURPOSE GREASE 30 LB. PAIL**  
*SUP41030*

Super Lube® Grease is a patented synthetic NLGI Grade 2, heavy-duty, multi-purpose lubricant with Syncolon® (PTFE). Synthetic base fluids and the addition of Syncolon® (PTFE) micro powders combine to form a premium lubricant that provides longer life protection against friction, wear, rust and corrosion over a temperature range of -45°F to 450°F (-43°C to 232°C). Machinery lasts longer, downtime is reduced and productivity is increased.



Super Lube® Multi-Purpose Synthetic Grease is dielectric, food grade, clean and environmentally friendly. It offers good mechanical stability, does not evaporate or form gummy deposits. It will not melt or separate.

Super Lube® Multi-Purpose Synthetic Grease is an NSF registered Food Grade lubricant, rated H1 for incidental food contact and meets former USDA (H1) guidelines.

Super Lube® Multi-Purpose Synthetic Grease is Kosher Certified.

NGLI Grade 2 Grease is NLGI GC-LB Certified.

- Dielectric
- Food grade and clean
- Will not drip, run or evaporate
- Impervious to salt water, safe in potable water
- Long lasting
- Prevents rust and corrosion while reducing friction
- Wide temperature range
- Compatible with most other greases
- Excellent water resistance and rust inhibiting properties
- Outlasts conventional greases 3 to 4 times

**FP 18 LTX**  
*600789190*

- 2 flow rates/pressures: 100 g/min at 10000 psi or 290 g/min at 6000 psi
- 9 pre-set grease volumes plus continuous mode
- 3-way trigger: on, locked on or locked off
- Operate with bulk grease or cartridges
- Barrel capacity: 450/500 g

