

FLAT WEBBING SLING

0.5T - 20T

Code	Size	WLL
910051	35mm x 1.1M	0.5T
910105	50mm x 0.5M	1T
910120	50mm x 2M	1T
910250	60mm x 5M	2T
910280	60mm x 8M	2T
910360	90mm x 6M	3T
910391	90mm x 10M	3T
910460	120mm x 6M	4T
911050	300mm x 5M	10T



POLYESTER ROUND SLING

1T - 80T

Code	Size	WLL
900110	45mm x 1M	1T
900220	50mm x 2M	2T
900330	60mm x 3M	3T
900440	70mm x 4M	4T
900540	80mm x 4M	5T
900620	90mm x 2M	6T
900820	100mm x 2M	8T
901005	110mm x 0.5M	10T
908030	300mm x 3M	80T




BEAVER ROUND AND FLAT LIFTING SLINGS

- Strong and non-damaging lift of a load
- Extremely lightweight and flexible
- Polyester webbing prevent "load bounce" when hoisting heavy weights
- Cushions the load against damage and reduces slipping

- Round slings compliant to AS 4497.1, Flat slings compliant to AS 1353.1

Round Sling Codes	Flat Sling Codes	Colour	WLL (t)	Length (m)
MRS1000	FS-2-1000	Violet	1	1 - 4
MRS2000	FS-2-2000	Green	2	1 - 4
MRS3000	FS-2-3000	Yellow	3	1 - 4
MRS4000	FS-2-4000	Grey	4	2 - 4

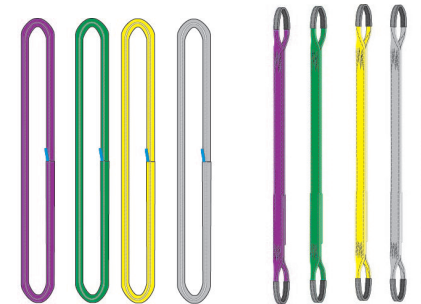

LINQ FLAT & ROUNDS SLINGS

SF(CAPACITY)(LENGTH) / SR(CAPACITY)(LENGTH)

- Material: 100% high tenacity UV resistant polyester for extreme UV conditions
- Working load designated by international protocol for load rating colours
- Flat: 1.0M - 5.0M x 1.0T - 5.0T
- Round: 1.0M - 6.0M x 1.0T - 8.0T
- Safety Factor: Flat 8:1, Round 7:1



BEAVER CHAIN SLINGS

- Grade 80
- Single leg and double leg chain slings complete with shortening grab hook and clevis self locking hooks
- Tested and tagged
- Complies to AS 3775.1



Product Code	Size (mm)	Leg	Length (m)	WLL (t)
CSA08127545	8	single	2	2
CSA08227545	8	double	2	3.5
CSA08137545	8	single	3	2
CSA08237525	8	double	3	3.5
CSA10127545	10	single	2	3.2
CSA10227545	10	double	2	5.5
CSA10137545	10	single	3	3.2
CSA10237545	10	double	3	5.5

GRADE 80 CHAIN SLING

1, 2, 4 LEGS



Code	Size	Leg
940822	8mm x 2M	2
941023	10mm x 3M	2