

## FLAT WEBBING SLING

0.5T - 20T

| Code   | Size        | WLL  |
|--------|-------------|------|
| 910051 | 35mm x 1.1M | 0.5T |
| 910105 | 50mm x 0.5M | 1T   |
| 910120 | 50mm x 2M   | 1T   |
| 910250 | 60mm x 5M   | 2T   |
| 910280 | 60mm x 8M   | 2T   |
| 910360 | 90mm x 6M   | 3T   |
| 910391 | 90mm x 10M  | 3T   |
| 910460 | 120mm x 6M  | 4T   |
| 911050 | 300mm x 5M  | 10T  |



## POLYESTER ROUND SLING

1T - 80T

| Code   | Size         | WLL |
|--------|--------------|-----|
| 900110 | 45mm x 1M    | 1T  |
| 900220 | 50mm x 2M    | 2T  |
| 900330 | 60mm x 3M    | 3T  |
| 900440 | 70mm x 4M    | 4T  |
| 900540 | 80mm x 4M    | 5T  |
| 900620 | 90mm x 2M    | 6T  |
| 900820 | 100mm x 2M   | 8T  |
| 901005 | 110mm x 0.5M | 10T |
| 908030 | 300mm x 3M   | 80T |




## BEAVER ROUND AND FLAT LIFTING SLINGS

- Strong and non-damaging lift of a load
- Extremely lightweight and flexible
- Polyester webbing prevent "load bounce" when hoisting heavy weights
- Cushions the load against damage and reduces slipping

- Round slings compliant to AS 4497.1, Flat slings compliant to AS 1353.1

| Round Sling Codes | Flat Sling Codes | Colour | WLL (t) | Length (m) |
|-------------------|------------------|--------|---------|------------|
| MRS1000           | FS-2-1000        | Violet | 1       | 1 - 4      |
| MRS2000           | FS-2-2000        | Green  | 2       | 1 - 4      |
| MRS3000           | FS-2-3000        | Yellow | 3       | 1 - 4      |
| MRS4000           | FS-2-4000        | Grey   | 4       | 2 - 4      |

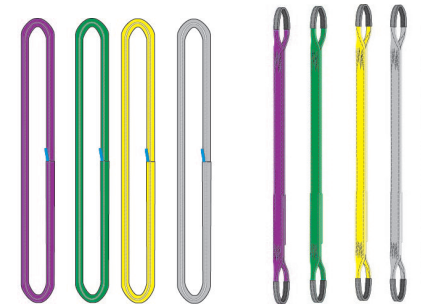

## LINQ FLAT & ROUNDS SLINGS

SF(CAPACITY)(LENGTH) / SR(CAPACITY)(LENGTH)

- Material: 100% high tenacity UV resistant polyester for extreme UV conditions
- Working load designated by international protocol for load rating colours
- Flat: 1.0M - 5.0M x 1.0T - 5.0T
- Round: 1.0M - 6.0M x 1.0T - 8.0T
- Safety Factor: Flat 8:1, Round 7:1



## BEAVER CHAIN SLINGS

- Grade 80
- Single leg and double leg chain slings complete with shortening grab hook and clevis self locking hooks
- Tested and tagged
- Complies to AS 3775.1



| Product Code | Size (mm) | Leg    | Length (m) | WLL (t) |
|--------------|-----------|--------|------------|---------|
| CSA08127545  | 8         | single | 2          | 2       |
| CSA08227545  | 8         | double | 2          | 3.5     |
| CSA08137545  | 8         | single | 3          | 2       |
| CSA08237525  | 8         | double | 3          | 3.5     |
| CSA10127545  | 10        | single | 2          | 3.2     |
| CSA10227545  | 10        | double | 2          | 5.5     |
| CSA10137545  | 10        | single | 3          | 3.2     |
| CSA10237545  | 10        | double | 3          | 5.5     |

## GRADE 80 CHAIN SLING

1, 2, 4 LEGS



| Code   | Size      | Leg |
|--------|-----------|-----|
| 940822 | 8mm x 2M  | 2   |
| 941023 | 10mm x 3M | 2   |

## BEAVER SHACKLE BOW GRADE S GALV

- Complies to AS2741



| Product Code | Size (mm) | WLL (t) |
|--------------|-----------|---------|
| 242305       | 5 x 6     | 0.33    |
| 242306       | 6 x 8     | 0.5     |
| 242308       | 8 x 10    | 0.75    |
| 242310       | 10 x 11   | 1       |
| 242311       | 11 x 13   | 1.5     |
| 242313       | 13 x 16   | 2       |
| 242316       | 16 x 19   | 3.2     |
| 242319       | 19 x 22   | 4.7     |
| 242322       | 22 x 25   | 6.5     |
| 242325       | 25 x 29   | 8.5     |



## BEAVER SHACKLE BOW GRADE S

- Alloy grade S shackles
- Colour Coded painted finish
- Suitable for mining, resource, and construction applications



- Complies to AS2741

| Product Code | Size (mm) | WLL (t) | Colour |
|--------------|-----------|---------|--------|
| 242310M      | 10 x 11   | 1       | Violet |
| 242313M      | 13 x 16   | 2       | Green  |
| 242316M      | 16 x 19   | 3.2     | Yellow |
| 242319M      | 19 x 22   | 4.7     | Grey   |
| 242322M      | 22 x 25   | 6.5     | Brown  |
| 242325M      | 5 x 29    | 8.5     | Blue   |

## GRADE S SHACKLE BOW TYPE, SCREW PIN



- Proof tested to 2 x working load limit
- With a minimum break force of 6 x WLL

| Code   | Size | WLL  |
|--------|------|------|
| 503006 | 6mm  | 0.5T |
| 503013 | 13mm | 2.0T |



## GRADE S SHACKLE DEE TYPE, SCREW PIN



- Proof tested to 2 x working load limit
- With a minimum break force of 6 x WLL


| Code   | Size | WLL  |
|--------|------|------|
| 504011 | 11mm | 1.5T |
| 504013 | 13mm | 2.0T |



## GRADE 80 WELD ON LIFTING POINT 1T - 8T



| Code   | WLL |
|--------|-----|
| 104001 | 1T  |
| 104003 | 3T  |



## BEAVER SAFETY CARGO NET NETSYS



- Sizes: S (2.46m X 2.46m), M (2.8m x 2.84m), L (2.8m X 3.44m)
- Multiple webbing loops and eyelets
- 4x Tie Ropes and 4x Cam Buckles
- UV stabilised and tightly woven mesh
- Integrated D rings to assist holding down
- For trailers, utes, boats, 4WD's and trucks
- Convenient heavy duty storage bag



## BEAVER WELD-ON RING BALPV0



- Sizes: 1.5, 2.5t, 4t, 6.7t
- Extremely high strength attachment as a lifting and lashing point
- Easily welded into required position with the aid of height lugs on the weld block
- Functional compact design
- Lifting ring has durable powder coated baked enamel finish



## PUNCTURE PROOF WHEEL 390MM



- Puncture proof wheel 390mm
- Axle diameter – 25mm
- Common bearing
- 150kg capacity
- Great to use on building sites
- Available in two widths – 90mm and 130mm



| Code  | Description                |
|-------|----------------------------|
| 28905 | Standard - 390mm x 90mm    |
| 28906 | Extra Wide - 390mm x 130mm |

## PNEUMATIC WHEEL 28904

- 390mm x 130mm
- Axle diameter – 25mm
- Common bearing
- 150kg capacity.





*the name behind the names.*

**CSS Members: Australian Owned & Independently Operated.**

**100 plus stores nationwide.**