


STEEL FRAMING



**GRIPSHANK™ SUPERSHARPY™**

1060 CARBON STEEL



Part No.	Description	mm	mm	mm	mm	qty	qty
SNC2359NG	Gripshank™ Supersharpy™ 38x2.5	0.4 - 2.5	38	2.5	6.4	1000	4000
SNC2509NG	Gripshank™ Supersharpy™ 50x2.5	0.4 - 2.5	50	2.5	6.4	800	3200
SNC2639NG	Gripshank™ Supersharpy™ 63x2.5	0.4 - 2.5	63	2.5	6.4	600	2400




**TRIM 15 GAUGE HARDENED BRADS**



Part No.	Description	mm	mm	gauge	qty	qty
SNS075-100T	Trim Brad 25x15g	0.4 - 3.0	25	15g	3000	30,000
SNS075-150T	Trim Brad 38x15g	0.4 - 3.0	38	15g	1500	15,000
SNS1200 Finish	Trim Brad 50x15g	0.4 - 3.0	50	15g	1500	15,000

Note: 15 Gauge = 15 Pins per inch



**STEEL CHASSIS PIN**

1060 CARBON STEEL



Part No.	Description	mm	mm	mm	mm	qty	qty
SNS5454PG	Twist Shank Pin with PT2000® Coating	0.9-4.0mm	45	3.6	7.6	3200	n/a




**GRIPSHANK™ SUPERSHARPY™**

1060 CARBON STEEL



Part No.	Description	mm	mm	mm	qty	qty
SNS2229DG	2.9 x 22mm Breakaway Nail Strip	22	2.9	6.4	1000	5000
SNS3829DG	2.9 x 38mm Breakaway Nail Strip	38	2.9	6.4	1000	5000



**Cooperage Pin**

1060 CARBON STEEL



Part No.	Description	mm	mm	mm	qty	qty
SNFP012C	2.8 x 13mm Cooperage Breakaway Nail Strip	13	2.8	6.4	5000	n/a



**Gas Tool**



**Fuel Cell**



**Metal Washer**



**Magnetic Adaptor**



Part No.	Description	qty	qty
SNTST3025C	Gas Pin Nailer for Breakaway Strip Pins	1	n/a
GT-IXF-24+	Gas GT Fuel Cell only	1	12
GTW25	25mm O.D. Metal Washer (use with GTMA-25W)	250	5000
GTMA-25W	Magnetic Adaptor for use with 25mm O.D. Metal Washer (suitable for GT-6 & GT-3 Tools)	1	n/a

# NAILING TOOLS, NAILS AND ACCESSORIES

## PASLODE POWERMASTER PF350-S STRIP NAILER

CODE B20430

Powerful - easily drives through hardwood



### Accessories

B20432	Hanger Bracket
F27625	Lubricating Oil
219228	No Mar Tip (for use with decking and cladding)
B20544L	Degreaser

### Fastener Specifications

Fastener type	Paslode JDN
Collation angle	34 degrees
Shank diameters	2.87 - 3.15mm
Shank types	Smooth & Ring
Shank lengths	50mm - 90mm
Finishes	Bright, Hot Dip Galvanised

### Tool Specifications

Weight	3.5kg
Length	495mm
Height	345mm
Operating Pressure	80psi - 120psi
Magazine capacity	84 nails approx.

### Applications

- Framing • Flooring • Roofing • Eaves
- Trusses • Joists • Decking • Cladding

### Fasteners

#### NAIL PACKS

PRODUCT CODE	LENGTH X DIAMETER	SHANK TYPE	FINISH	QTY
B20463	50mm x 2.87mm	Smooth	Bright	3,000
B20528D	50mm x 2.87mm	Smooth	Hot Dipped Galv	3,000
B20465	65mm x 2.87mm	Smooth	Bright	3,000
B20529	65mm x 2.87mm	Smooth	Hot Dipped Galv	3,000
B20531	65mm x 2.87mm	Ring	Bright	3,000
B20539	75mm x 3.06mm	Ring	Bright	3,000
B20467	75mm x 3.06mm	Smooth	Bright	3,000
B20529D	75mm x 3.06mm	Smooth	Hot Dipped Galv	3,000
B20469	90mm x 3.15mm	Smooth	Bright	3,000
B20529F	90mm x 3.15mm	Smooth	Hot Dipped Galv	3,000

## PASLODE CNW70.2 COIL NAILER

CODE B21095

Powerful - easily drives through hardwood

Toolfree Depth Set - easily adjusts for flush or deep drive

Dual Fastener Range - accepts wire and plastic coil nails



### Tool Specifications

Weight	2.85kg
Length	272mm
Height	323mm
Operating Pressure	70psi - 110psi
Fastener capacity	250 nails approx.

### Fastener Specifications

Fastener type	Paslode plastic sheet & wire coil nails
Collation angle	15 degrees
Shank diameters	2.5mm - 2.8mm
Shank types	Smooth, Ring, Screw
Shank lengths	32mm - 70mm
Finishes	Bright, Electro Galvanised, Hot Dipped Galvanised, Stainless Steel

### Accessories

F27625	Pneumatic Oil
--------	---------------

### Applications

- Decking
- Cladding
- Fencing
- Ply bracing
- Flooring
- Metal connectors  
(Trip-L grips etc.)


### Fasteners

#### PLASTIC COLLATION

PRODUCT CODE	LENGTH X DIAMETER	SHANK TYPE	FINISH	QTY
B25110*	32mm x 2.5mm	Screw	Electro Galv	3,600
B25115	32mm x 2.7mm	Smooth	Hot Dipped Galv	3,600
B25120	32mm x 2.7mm	Ring	Hot Dipped Galv	3,600
B25135	45mm x 2.5mm	Ring	Hot Dipped Galv	1,800
B25140	50mm x 2.5mm	Ring	Hot Dipped Galv	1,800
B25145	50mm x 2.5mm	Ring	Stainless Steel	1,800
B25150	50mm x 2.5mm	Screw	Stainless Steel	1,800
B25155*	52mm x 2.5mm	Ring	Hot Dipped Galv	1,800
B25160*	52mm x 2.5mm	Ring	Stainless Steel	1,800
B25165*	52mm x 2.5mm	Screw	Hot Dipped Galv	1,800
B25170*	52mm x 2.5mm	Screw	Stainless Steel	1,800
B25175	60mm x 2.5mm	Smooth	Hot Dipped Galv	1,800
B25180*	60mm x 2.7mm	Ring	Hot Dipped Galv	1,800
B25185*	60mm x 2.7mm	Ring	Stainless Steel	1,800
B25195*	60mm x 2.7mm	Screw	Stainless Steel	1,800

\* Dome Head Nails • Hardened

**PASLODE FRAMEMASTER**  
CODE B20580

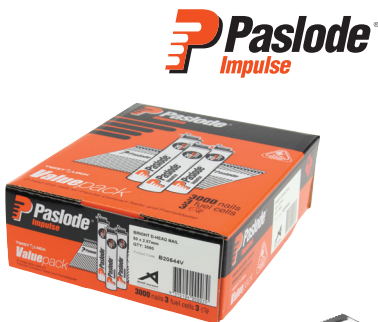

**Paslode Impulse Technology –**

No cords, no hoses, no compressors

**Li-Ion Battery Technology –**

Drives up to 9,000 nails per 1 hour charge.

**Tool Specifications**

Weight	3.3kg
Length	310mm
Height	386mm
Cycle rate	1,000/Hr.
Fuel cell life	1,000 nails
Battery life	9,000 shots approx.
Magazine capacity	52 nails approx.

**Applications**

- Framing • Flooring • Roofing • Eaves
- Trusses • Joists • Decking • Cladding

**Accessories**

B20544L	Degreaser
B20544F	Lubricating Oil
B20543F	Fuel Cell
B20544G	No Mar Tip
B20543A	Li-Ion Battery

**Fastener Specifications**

Fastener Type	D Head, DekFast®, CladFast®
Collation Type	ProStrip™ Paper Tape
Shank diameters	2.87, 3.06 & 3.15mm
Shank types	Smooth, Ring
Shank lengths	50 - 90mm
Finishes	Bright, Armor Galv, Hot Dip Galvanised

**Fasteners**

**VALUE PACKS** (3,000 nails and 3 fuel cells)

PRODUCT CODE	LENGTH X DIAMETER	SHANK TYPE	FINISH
B20544V	50mm x 2.87mm	Smooth	Bright
B20565V	50mm x 2.87mm	Smooth	Hot Dip Galv
B20546V	65mm x 2.87mm	Smooth	Bright
B20547V	75mm x 3.06mm	Smooth	Bright
B20563V	75mm x 3.06mm	Ring	Bright
B20569V	75mm x 3.06mm	Smooth	Hot Dip Galv
B20548V	82mm x 3.15mm	Smooth	Bright
B20570V	82mm x 3.15mm	Smooth	Hot Dip Galv
B20550V	90mm x 3.15mm	Smooth	Bright
B20571V	90mm x 3.15mm	Smooth	Hot Dip Galv

**DEKFAST VALUE PACKS** (3,000 nails and 3 fuel cells)

PRODUCT CODE	LENGTH X DIAMETER	SHANK TYPE	FINISH
B20561V	50mm x 2.87mm	Ring	Armor Galv
B20562V	65mm x 2.87mm	Ring	Armor Galv

**HANDY PACKS** (1,000 nails and 1 fuel cell)

PRODUCT CODE	LENGTH X DIAMETER	SHANK TYPE	FINISH
B20552	50mm x 2.87mm	Smooth	Hot Dip Galv
B20551	75mm x 3.06mm	Smooth	Bright
B20554	75mm x 3.06mm	Smooth	Hot Dip Galv
B20555	82mm x 3.15mm	Smooth	Hot Dip Galv
B20550	90mm x 3.15mm	Smooth	Bright
B20571	90mm x 3.15mm	Smooth	Hot Dip Galv

**DEKFAST HANDY PACKS** (1,000 nails and 1 fuel cell)

PRODUCT CODE	LENGTH X DIAMETER	SHANK TYPE	FINISH
B20557	50mm x 2.87mm	Ring	Armor Galv
B20558	65mm x 2.87mm	Ring	Armor Galv

**CLADFAST HANDY PACKS** (1,000 nails and 1 fuel cell)

PRODUCT CODE	LENGTH X DIAMETER	SHANK TYPE	FINISH
B20548	50mm x 2.87mm	Ring	Armor Galv

**PASLODE IMPULSE IM250A-LI TRIMMASTER LI-ION 16GA ANGLED BRADDER**

CODE B20721



**Li-Ion Battery Technology –** Drives up to 9,000 nails per 1 hour charge  
**Battery On/Off Position –** Power conservation and safer handling  
**Angled Magazine –** Easy to reach tight spots



**Tool Specifications**

Weight	2.0kg
Length	274mm
Height	292mm
Cycle rate	500/Hr
Fuel cell life	1,000 nails
Battery life	9,000 shots approx.
Magazine capacity	100 brads approx.

**Applications**

- Architraves • Beading • Door Jambes • Mouldings
- Skirting Boards • Quads • Panelling • Stair Rails

**Accessories**

B20544L	Degreaser
B20544F	Lubricating Oil
B20544S	Fuel Cell
B20543A	Li-Ion Battery

**Fastener Specifications**

Fastener type	Angled Brad Nails
Collation type	Glued
Shank diameters	1.6mm 1.4mm (16 Ga)
Shank types	Smooth
Shank lengths	32mm - 63mm
Finishes	Electro Galvanised, Stainless Steel

**Fasteners**

**BRAD FUEL PACKS** (2,000 nails and 2 fuel cells)

PRODUCT CODE	LENGTH X DIAMETER	SHANK TYPE	FINISH
B20732	32mm x 16 Gauge	Smooth	Electro Galv
B20738	38mm x 16 Gauge	Smooth	Electro Galv
B20745	45mm x 16 Gauge	Smooth	Electro Galv
B20750	50mm x 16 Gauge	Smooth	Electro Galv
B20765	63mm x 16 Gauge	Smooth	Electro Galv

**BRAD FUEL PACKS** (2,000 nails and 2 fuel cells)

PRODUCT CODE	LENGTH X DIAMETER	SHANK TYPE	FINISH
B20780	38mm x 16 Gauge	Smooth	Stainless Steel
B20785	50mm x 16 Gauge	Smooth	Stainless Steel

## 18V XR ELECTRICIAN STAPLER

DCN701N-XJ

**DEWALT**

- 35 Staple Capacity for enhanced productivity
- Nail Length: 25.4mm
- Integrated cable guide for easy alignment of cables
- Automatic Depth of drive to ensure consistent drive without user intervention



## 18V XR LI-ION 2 SPEED FRAMING NAILER

DCN692N-XE

**DEWALT**

- Sequential and bump operating mode
- Tool free stall/jam clearance minimises user down time
- User can engage contact trip lock-off and prevent accidental dis-charge of fastener
- Depth of drive can be adjusted
- Nail Diameter: 2.8 - 3.3mm, Nail Length: 50 - 90mm



## 18V 15GA FINISH NAILER

DCN650N-XJ

**DEWALT**

- Sequential and bump operating mode
- Tool free stall/jam clearance minimises user down time
- User can engage contact trip lock-off and prevent accidental discharge of fastener
- Depth of drive can be adjusted
- Nail Diameter: 2.8 - 3.3mm, Nail Length: 50 - 90mm



## 18V XR LI-ION CONCRETE NAILER KIT - 5.0AH

DCN890P2-XE

**DEWALT**

- Three power levels to optimise the nailer for a variety of nail lengths and base material types
- Sequential mode allows for precision placement and 'RapidCycle' for applications requiring faster shot rates
- Nail Diameter: 2.6-3.7mm, Nail Length: 13-57mm
- Tool free stall / jam clearance minimises user down time
- 2x 18V XR Li-Ion 5.0Ah Batteries, Charger, TSTAK Kitbox



## 16GA CORDLESS NAILER STRAIGHT BARE EANZ

DCN662N-XJ

**DEWALT**

- Micro Nose design for accurate placement of the nails
- Quick Jam Release feature for quick jam clear up
- Tool free depth of drive adjustment to ensure accurate placement of nail
- 16ga, 1.6mm nail diameter, 32mm-64mm nail length



## SAFETY ADVICE

Always wear the correct safety gear.

▶ Glasses



▶ Hearing Protection



▶ Gloves



Please refer to page 374-412