

BROAD BRIM VENTED HARD HAT

- Certified Australian design & manufacture
- Type 1 high impact rated ABS
- Unique 360° Broad Brim design

maxisafe



Product Code	Colour
HVB570-W	White
HVB570-Y	Yellow
HVB570-FY	Fluro Yellow
HVB570-R	Red
HVB570-OR	Orange
HVB570-BL	Blue
HVB570-GR	Green



V9 VENTED HARD HATS

- Lightweight, durable ABS shell
- 9 air vents for increased air circulation & comfort
- Sweatband prevents perspiration build-up
- Extended peak for added protection
- Edge gutter to deflect rain
- Colours: Black, Blue, Fluoro Orange, Fluoro Pink, Fluoro Yellow, Green, Orange, Red, White, Yellow
- Certified to AS/NZS 1801: 1997



Product Code	Description
HHV9-(COLOUR)	V9 Vented Hard Hat with Ratchet Harness
HHV9R-(COLOUR)	V9 Vented Hard Hat with PushLock Harness

MAXISAFE VENTED HARD HAT - SLIPLOCK HARNESS

- Sliplock Harness adjustment
- 6 point webbed harness & cradle system
- 10 ventilation points

maxisafe



Product Code	Colour
HVS590-W	White
HVS590-Y	Yellow
HVS590-FY	Fluro Yellow
HVS590-BK	Black
HVS590-R	Red
HVS590-O	Orange
HVS590-BL	Blue
HVS590-G	Green
HVS590-P	Pink



Ratchet harness also available!!

V6 VENTED FULL BRIM HARD HAT

- Lightweight, durable ABS shell
- 6 air vents for increased air circulation & comfort
- 6 point ratchet harness
- Sweatband prevents perspiration build-up
- Full brim extends coverage to over the neck & ears
- Slightly shorter front peak allowing for good upward vision
- Colours: Green, Orange, Red, White, Yellow



AIRBUMP LITE BUMP CAPS

- Unique AIRBUMP Flex Liner affords the wearer class leading benefits
- Ultimate bump protection with high ventilation & airflow
- Fully Adjustable: Sizing ranges from 53 to 64cm head size
- Super light giving ultimate all day comfort
- Washable & embroidery friendly outer cap

PRO
PRO CHOICE SAFETY GEAR



Product Code	Description
BCAB	AirBump Lite Bump Cap with Standard Peak
BCABSP	AirBump Lite Bump Cap with Short Peak

TUFFGARD HARD HAT WHITE

FRTG57VTD / FRTG56NV0

FRONTIER
SAFETY

- Also in Blue, Green, Orange, Red, Yellow
- Extra strong & robust yet light weight
- Adjustable 6 point webbed harness
- Rain guard with reinforced peak
- Compatible with 25 & 30mm accessories (cap attachable earmuffs, visor holder etc)
- Vented Hard Hat: ABS construction



TUFFGARD REPLACEMENT SWEAT BAND TERRY TOWELLING - BLACK

RSB

- Terry towelling replacement sweat band
- Easy to fit head protection
- Ideal for long working periods and hot work environments
- Made from all cotton material to increase comfort

FRONTIER
SAFETY



MEDIQ EYEWASH STATION ENCLOSED PLASTIC CABINET

EWSEP

MEDIQ
THE SMART CHOICE IN FIRST AID

- Easily wall mounted in proximity to the workplace
- Ensures quick & efficient eye irrigation
- Recommend wash time: 500 ml: 5 min
- MEDIQ Saline Eyewash contains a 0.9% sodium chloride solution that corresponds to the natural salt content of the eye fluid
- User-friendly design allows bottles to be quickly opened with a single hand
- Dimensions (mm): 170W x 250H x 80D



PRATT PORTABLE GRAVITY FED EYE WASH UNIT 55L SE5050



- A secure & cost effective solution for an eyewash station where plumbed water is not available
- Comes with 1 bottle of Water Preservative (SE4764)
- Dimensions (mm): 530L x 495W x 600H
- Material of construction: Polyethylene



PRATT COMBINATION SHOWER WITH EYE & FACE WASH NOZZLE WITH BOWL & FOOT TREADLE SE607




- The eye / face wash features six aerated nozzle outlets for a soft & even water pattern
- Constructed mainly from 304 stainless steel material
- Operation: Shower by hand, face wash by hand or foot
- Dimension (mm): 2450H x 470W x 883D mm
- Inlet Connection: 25mm BSPM
- Water Supply-Line: Size 25mm
- *Must be hydraulically sized to meet requirements
- Outlet Connection: 25mm BSPM
- Minimum Performance Requirements: 210kPa / 30PSI
- *Caution should be taken when pressure exceeds 550kPa
- Flow Output: (At min performance requirement) Shower 80 LPM, Eye Wash 15 LPM, Eye-Face Wash 30 LPM



COMBINATION SHOWER WITH TRIPLE NOZZLE EYE & FACE WASH WITH BOWL. NO FOOT TREADLE SE603



- This combination shower and AEROSTREAM face wash provides a comprehensive individual decontamination either the shower or eye/face wash or both simultaneously.
- The eye / face wash features six aerated nozzle outlets for a soft and even water pattern. The nozzles also include a self-closing dust cover.
- Constructed mainly from 304 stainless steel material to provide a long service life in most environments.
- Operation: Shower by hand, face wash by hand
- Dimension (mm): 2450H x 470W x 883D mm
- Rec Min Connection: 25mm
- Rec Min Supply: 140-150 LPM
- Shower Flow Rate: 90 LPM
- Eye Wash Flow Rate: 30 LPM
- Minimum Pressure: 210 kPa
- Material of Construction: 304 Stainless Steel
- Australian Standard: AS4775

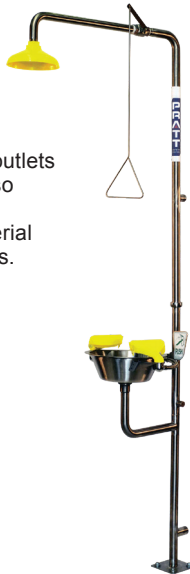

COMBINATION SHOWER WITH SINGLE NOZZLE EYE WASH WITH BOWL & FOOT TREADLE SE612



- This combination shower and AEROSTREAM eyewash provides a comprehensive individual decontamination from either the shower or eyewash or both simultaneously.
- The eyewash features single aerated nozzle outlets for a soft and even water pattern. The nozzles also include dust cover.
- Constructed mainly from 304 stainless steel material to provide a long service life in most environments.
- Operation: Shower by hand, eyewash by foot
- Dimension (mm): 2450H x 470W x 883D mm
- Rec Min Connection: 25mm
- Rec Min Supply: 120-130 LPM
- Shower Flow Rate: 90 LPM
- Eye Wash Flow Rate: 20 LPM
- Minimum Pressure: 210 kPa
- Material of Construction: 304 Stainless Steel
- Australian Standard: AS4775



COMBINATION SHOWER WITH SINGLE NOZZLE EYE WASH NO BOWL. NO FOOT TREADLE SE675



- This combination shower and AEROSTREAM eyewash provides a comprehensive individual decontamination from either the shower or eyewash or both simultaneously.
- The eyewash features single aerated nozzle outlets for a soft and even water pattern. The nozzles also include dust cover.
- Constructed mainly from 304 stainless steel material to provide a long service life in most environments.
- Operation: Shower by hand, eyewash by hand
- Dimension (mm): 2450H x 470W x 883D mm
- Rec Min Connection: 25mm
- Rec Min Supply: 120-130 LPM
- Shower Flow Rate: 90 LPM
- Eye Wash Flow Rate: 20 LPM
- Minimum Pressure: 210 kPa
- Material of Construction: 304 Stainless Steel
- Australian Standard: AS4775



PEDESTAL MOUNTED SINGLE NOZZLE EYE WASH WITH BOWL & FOOT TREADLE SE546



- This is an dual design aerated eye wash for applications which pose a hazard to the eyes but not the face, such as dust, airborne particles and mild chemicals.
- The Robust eye wash nozzles are made from thermoplastic resin for excellent weather resistance.
- Type: Hand and foot operated
- Dimension (mm): 1090H x 470W x 523D mm
- Rec Min Connection: 15mm
- Rec Min Supply: 30 LPM
- Eye Wash Flow Rate: 20 LPM
- Minimum Pressure: 210 kPa
- Material of Construction: 304 Stainless Steel
- Australian Standard: AS4775

