

PRATT PORTABLE GRAVITY FED EYE WASH UNIT 55L SE5050



- A secure & cost effective solution for an eyewash station where plumbed water is not available
- Comes with 1 bottle of Water Preservative (SE4764)
- Dimensions (mm): 530L x 495W x 600H
- Material of construction: Polyethylene



PRATT COMBINATION SHOWER WITH EYE & FACE WASH NOZZLE WITH BOWL & FOOT TREADLE SE607




- The eye / face wash features six aerated nozzle outlets for a soft & even water pattern
- Constructed mainly from 304 stainless steel material
- Operation: Shower by hand, face wash by hand or foot
- Dimension (mm): 2450H x 470W x 883D mm
- Inlet Connection: 25mm BSPM
- Water Supply-Line: Size 25mm
- *Must be hydraulically sized to meet requirements
- Outlet Connection: 25mm BSPM
- Minimum Performance Requirements: 210kPa / 30PSI
- *Caution should be taken when pressure exceeds 550kPa
- Flow Output: (At min performance requirement) Shower 80 LPM, Eye Wash 15 LPM, Eye-Face Wash 30 LPM



COMBINATION SHOWER WITH TRIPLE NOZZLE EYE & FACE WASH WITH BOWL. NO FOOT TREADLE SE603



- This combination shower and AEROSTREAM face wash provides a comprehensive individual decontamination either the shower or eye/face wash or both simultaneously.
- The eye / face wash features six aerated nozzle outlets for a soft and even water pattern. The nozzles also include a self-closing dust cover.
- Constructed mainly from 304 stainless steel material to provide a long service life in most environments.
- Operation: Shower by hand, face wash by hand
- Dimension (mm): 2450H x 470W x 883D mm
- Rec Min Connection: 25mm
- Rec Min Supply: 140-150 LPM
- Shower Flow Rate: 90 LPM
- Eye Wash Flow Rate: 30 LPM
- Minimum Pressure: 210 kPa
- Material of Construction: 304 Stainless Steel
- Australian Standard: AS4775

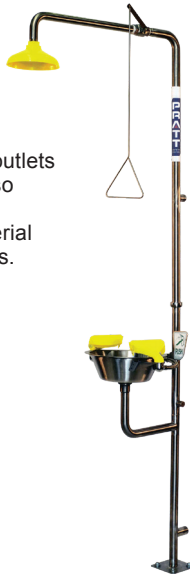

COMBINATION SHOWER WITH SINGLE NOZZLE EYE WASH WITH BOWL & FOOT TREADLE SE612



- This combination shower and AEROSTREAM eyewash provides a comprehensive individual decontamination from either the shower or eyewash or both simultaneously.
- The eyewash features single aerated nozzle outlets for a soft and even water pattern. The nozzles also include dust cover.
- Constructed mainly from 304 stainless steel material to provide a long service life in most environments.
- Operation: Shower by hand, eyewash by foot
- Dimension (mm): 2450H x 470W x 883D mm
- Rec Min Connection: 25mm
- Rec Min Supply: 120-130 LPM
- Shower Flow Rate: 90 LPM
- Eye Wash Flow Rate: 20 LPM
- Minimum Pressure: 210 kPa
- Material of Construction: 304 Stainless Steel
- Australian Standard: AS4775



COMBINATION SHOWER WITH SINGLE NOZZLE EYE WASH NO BOWL. NO FOOT TREADLE SE675



- This combination shower and AEROSTREAM eyewash provides a comprehensive individual decontamination from either the shower or eyewash or both simultaneously.
- The eyewash features single aerated nozzle outlets for a soft and even water pattern. The nozzles also include dust cover.
- Constructed mainly from 304 stainless steel material to provide a long service life in most environments.
- Operation: Shower by hand, eyewash by hand
- Dimension (mm): 2450H x 470W x 883D mm
- Rec Min Connection: 25mm
- Rec Min Supply: 120-130 LPM
- Shower Flow Rate: 90 LPM
- Eye Wash Flow Rate: 20 LPM
- Minimum Pressure: 210 kPa
- Material of Construction: 304 Stainless Steel
- Australian Standard: AS4775



PEDESTAL MOUNTED SINGLE NOZZLE EYE WASH WITH BOWL & FOOT TREADLE SE546



- This is an dual design aerated eye wash for applications which pose a hazard to the eyes but not the face, such as dust, airborne particles and mild chemicals.
- The Robust eye wash nozzles are made from thermoplastic resin for excellent weather resistance.
- Type: Hand and foot operated
- Dimension (mm): 1090H x 470W x 523D mm
- Rec Min Connection: 15mm
- Rec Min Supply: 30 LPM
- Eye Wash Flow Rate: 20 LPM
- Minimum Pressure: 210 kPa
- Material of Construction: 304 Stainless Steel
- Australian Standard: AS4775

