

SCREWS AND AUTO-FEED SCREW SYSTEMS

VORTEX™ CYCLONE

BREMICK

UNIVERSAL CYCLONE ASSEMBLY FOR STEEL & TIMBER



2X PROTECTION

More than double the Corrosion protection of conventional Class 4 in category 5 environments.

8X TOUGHER

Than conventional Class 4 Extremely abrasion resistant. Minimal coating loss during installation.

30% FASTER DRILLING

Than conventional Class 4

The Bremick Vortex™ Cyclone is a preassembled Universal Cyclone Assembly complete with a marine grade Aluminium/ EPDM “BRA” Cyclone washer, suitable for use with all corrugated and square rib roofing profiles which is mounted on the Vortex™ self drilling screw, designed for universal application into Timber, Metal Battens and Steel purlins up to 2mm thick.* Available in 25mm, 55mm, 65mm and 95mm.

Available in galvanised and B8 finishes.

Heavy Duty BRA Washer

- Marine Grade Aluminium
- EPDM Extruded Seal
- Non conductive
- 4 Sealing points

TopGrip™

- Maintains sealing pressure
- Vortex™ Thread

- For optimum performance in timber and steel.

Universal Drill Point

- Timber, metal battens, Steel purlins

Tested & Certified to:

- BCA – Spec B 1.2 • AS 4040 • AS 1562.1
- NT Deemed To Comply

Product	Features	QTY	Pack	Code
M6.2-13 x 25	CL4+, W	250	Bulk	SUHC462025D
	B8(CAT5),W	250	Bulk	SUHC862025D
M6.2-13 x 55	CL4+, TG, W	250	Bulk	SUHC462055D
	B8(CAT5), TG, W	250	Bulk	SUHC862055D
M6.2-13 x 65	CL4+, TG, W	250	Bulk	SUHC462065D
	B8(CAT5),TG,W	250	Bulk	SUHC862065D
M6.2-13 x 95	CL4+, TG, W	250	Bulk	SUHC462095D

VORTEX™ POLY

BREMICK

POLYCARBONATE ASSEMBLY FOR TIMBER




PATENT PENDING

One Step fastening of corrugated and square rib sheeting. Ideal for profile rib heights 16mm to 29mm. Cutting fins automatically form expansion hole and self centre screw during installation. Vortex™ universal screw for timber or steel up to 1.5mm thick. Armour Coat™ protection to AS 3566 Class 4. 26mm diameter EPDM sealing washer for water tight seal. Available in 50mm and 65mm length.

VORTEX™ FIBREGLASS

BREMICK

METAL DRILLING FIBREGLASS ASSEMBLY

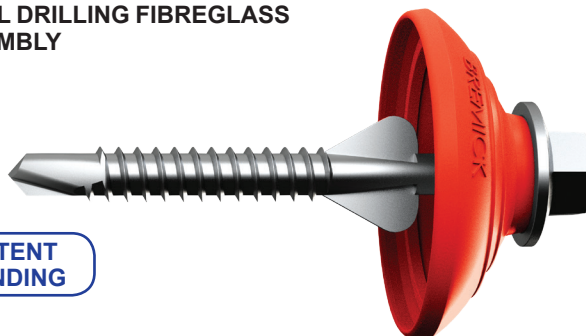


PATENT PENDING

One Step fastening of corrugated and square rib sheeting. Suitable for profile rib heights 16mm to 35mm into steel purlins up to 2.4mm. Cutting fins automatically form expansion hole and self centre screw. Armour Coat™ protection. Weather seal sealing washer for water tight and secure fastening. Hi Visibility seal highlights non trafficable sky light zones. Available in 65mm length.

VORTEX™ ROOF

BREMICK

UNIVERSAL ROOFING SCREW FOR STEEL & TIMBER

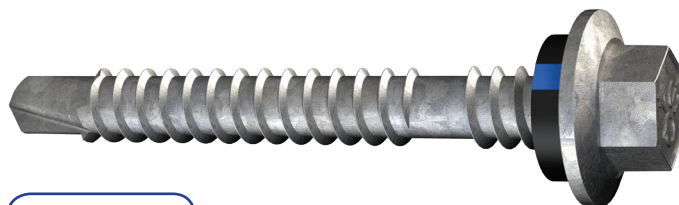

PATENTED

Increases drill drive speed. Provides faster installation by reducing torque. Eight times harder than conventional Class 4 coatings. Fully compatible with COLORBOND® Ultra Steel, ZINCALUME®, COLORBOND® and Galvanized and Zinc coated products. Suitable for use in ACQ and CCQ treated timber. Available in 50mm and 65mm length.

Available in galvanised and B8 finishes.

ONE SHOT™ POLYCARBONATE SCREWS



Material Number	Description
SDPOSC41260100-PWR	860 - Sd Powers Oneshot C4 12X60 100Pk
SDPOSC41260500-PWR	861 - Sd Powers Oneshot C4 12X60 500Pk
T17POSC412501H-PWR	870 - T17 Powers Oneshot C4 12X50 100Pk
T17POSC412505H-PWR	871 - T17 Powers Oneshot C4 12X50 500Pk
T17POSC412651H-PWR	872 - T17 Powers Oneshot C4 12X65 100Pk
T17POSC412655H-PWR	873 - T17 Powers Oneshot C4 12X65 500

HEX HEAD FLANGE WITH SEAL T9PM4XS




- Metal / Class 4
- XGRIP®
- Scratchguard®



HEX HEAD WITH MULTISEAL T9PM4YM




- Cyclone
- Metal
- Class 4



VMAX® HEX HEAD FLANGE WITH SEAL T9PV4XS



- Class 4 - XGRIP®
- Scratchguard®
- Steel / Timber



BI-FIX™ HEX HEAD WITH ALUMINIUM SEAL T4XMXAH



- Bi-Metal
- SS 304



TORNADO SCREWS



A registered dual fine and coarse thread screw. Fine thread for metal batten fixing & coarse thread for timber fixing. This screw has shank protection and excellent holding power. Available in class 4 galvanised head or Colorbond* painted head. *Colorbond is a registered trademark of BlueScope Steel Ltd.



MULTIPURPOSE SELF DRILLING SCREW



The Macsim Self Drilling Screws are designed to drill through mild and structural steel. No pre-drilling required. Available in a range of head types and finishes.




HEAD	FINISH	LENGTH
Hex	YZP, Gal, SS	Various
Button	YZP, Climogard	12mm-30mm
Wafer	YZP, Climogard, SS	16mm-40mm
Bugle	YZP, Climogard	25mm-75mm
Csk.	YZP, Climogard, SS	16mm-65mm
Self Embed.	YZP, Climogard	20mm-40mm
Pan	YZP, Climogard, SS	12mm-25mm

CSK RIBBED WITH WINGS SQUARE DRIVE T9PG3RQ




- Metal
- Class 3



REDUCED HEX HEAD FLANGE T9PM3RH



- Metal
- Class 3



SELF DRILLING SCREW HEX FLANGE



- Imperial
- SS 304



SELF DRILLING SCREW WAFER PHILLIPS



- Imperial
- SS 304



SELF DRILLING SCREW CSK PHILLIPS



- Imperial
- SS 304



SELF DRILLING SCREW PAN PHILLIPS



- Imperial
- SS 304

