

# SEAL 'N' FLEX® ONE PLUS P590

Polyurethane sealants benefit from greater joint movement capability over conventional silicone sealants. This makes Seal N' Flex® One Plus P590 perfect for sealing larger joints between building materials, which can be concealed by painting over with acrylic-based paint.

- +100%/-50% joint movement
- Extremely elastic, > 1,000% elongation at break
- Bubble-free curing
- Sag-free, easy tooling
- Paintable\*
- Made in Australia



SEALN'FL

# REPAIR EXPRESS CEMENT

128000 - 290mL - Beige 125786 - 290mL - Grey

- Very fast curing
- Granular structure
- Paintable
- Does not shrink
- Water clean up







SELLEYS'





#### FILL & FIX & BOND

Used for filling empty spaces, insulating, filling holes & cracks, filling between pipes, and sound deadening. Prevents water and unwanted pest penetration. Can be painted. It is a powerful adhesive and fire retardant, (Conforms to fire class B3).

SIZE	CODE	COLOUR
750ml	53MPF750	Cream



MACSIN

FILL Q F


R R N N I

### **N-MASTIC**

Non-skinning polybutene-based compound. It will remain permanently soft and paste-like.

- Non-hardening remains
- permanently flexible
- Good adhesion
- Provides an excellent barrier to water vapour transmission
- Resists microbial attack
- Low shrinkage
- Wide service temperature
- range -40°C to +80°C
- Available in 410g



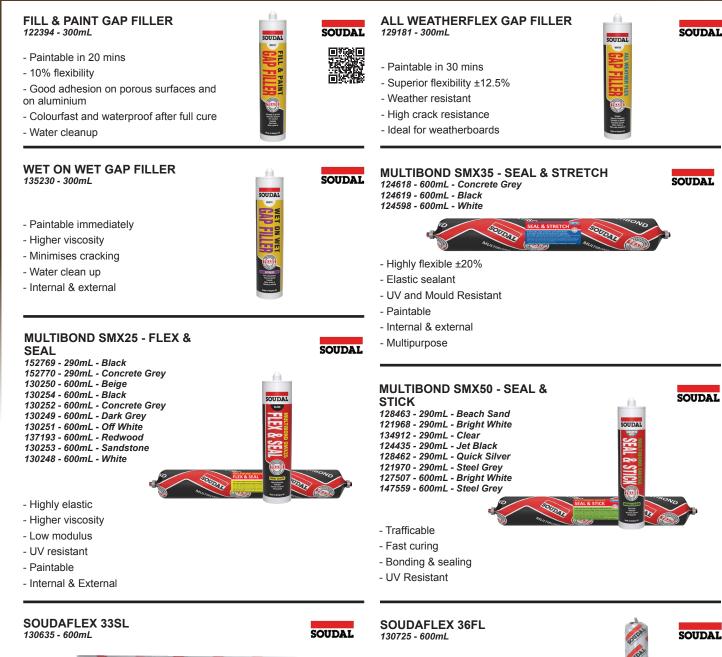

- 1 103 103 103 103 103 103
- Self-levelling polyurethane flooring sealant
- Permanently flexible
- Good weather and UV resistance
- Non-staining on natural stone and concrete
- Resistant to lubricants, oils, petrol and chemicals

# 425 TRADE PU

- Hybrid polyurethane sealant
- Excellent weatherproofing properties
- Low modulus
- Isocyanate & solvent free
- Highly elastic ±25%
- Available in 600mL in Concrete Grey, Black and White



chemicals

Polyurethane flooring sealantPermanently flexible

- Good weather and UV resistance

- Non-staining on natural stone and concrete

- Resistant to lubricants, oils, petrol and





### www.constructionsupply.com.au



## FOSROC NITOSEAL SC800

Nitoseal SC800 is a low modulus, high joint movement accommodation, one component silicone rubber joint sealant.

SC800	Nitoseal' SC8	00 Nitoseal' SCP	
Produ	ct Code	Description	Size
FC9201	30-600ML	Nitoseal SC800 Concrete Grey 600ml	600ML

#### FOSROC NITOSEAL MS250



Nitoseal MS250 is a resistant elastomeric joint sealant based on silyl modified polymers which provides excellent weathering and adhesion performance. Nitoseal MS250 is paintable with waterbased paints.



Product Code	Description	Size
FC920171-600ML	Nitoseal MS250 Concrete Grey 600ml	600ML

## FOSROC NITOSEAL SC600



Nitoseal SC600 is a one part, gun applied joint sealant designed for sealing joints exposed to aggressive chemical environments. Nitoseal SC600 is resistant to attack from most of the aggressive chemicals used in the food, mining and chemical processing industries. Complies to AS4020:2018.



Product Code	Description	Size
FC920100-600ML	Nitoseal SC600 Concrete Grey 600ml	600ML
FC920101-600ML	Nitoseal SC600 Pool Blue 600ml	600ML
FC920102-600ML	Nitoseal SC600 White 600ml	600ML

#### **NITOSEAL PU250**



Nitoseal PU250 is a high performance elastomeric polyurethane joint sealant which forms a waterproof and durable seal making it ideal for vertical exterior applications such as sealing joints in concrete panels, fibrous cement products, external cladding panels, blockwork and brickwork.



Product Code	Description	Size
FC920112-600ML	Nitoseal PU250 Concrete Grey 600ml	600ML

s	FOSROC NITOSE	AL MS400	FOSROC	onstructive solutions
	joint sealant based o	trafficable, UV resistant elaston n silyl modified polymers which sion performance together w	ch provide excel	lent
	eal' MS400 🕂 🕅 Nitoseal' MS4	00 Nitoseal' MS400		
	Product Code	Description		Size
	FC920181-600ML	Nitoseal MS400 Concrete	Grey 600ml	600ML
			FOSTOC	

#### **NITOSEAL PU400**



Nitoseal PU400 is a medium modulus, elastomeric polyurethane joint sealant/adhesive which forms a waterproof and durable seal. It is ideal for exterior applications such as sealing joints and bonding between most construction materials, where a high bond strength and abrasion resistance is required. Suitable for water immersed applications and trafficable surfaces.



Product Code	Description	Size
FC920121-600ML	Nitoseal PU400 Concrete Grey 600ml	600ML

### FOSROC FLAMEX XT



Flamex XT is a high performance fire and acoustic rated elastomeric joint sealant based on silyl modified polymers for sealing exterior and interior movement joints where a fire rating of up to 4 hours is required.



Product Code	Description	Size
FC920045-600ML	Flamex XT Concrete Grey 600ml	600ML

#### **TOOL BOX ORIGINAL MS ADHESIVE & SEALANT**

Tool Box Original is a permanently flexible MS based sealant & adhesive in one. Recommended for both interior and exterior applications, Tool Box is easy to tool, skins within 10 minutes and develops bond strength after only 30 minutes. Tool Box provides a waterproof seal which is paintable, UV and mould resistant.



H.B. Fuller

		Grabs fast	
Format	Product Code	Colour	
400g Cartridge	15019416	White	
400g Cartridge	15019418	Grey	
400g Cartridge	15019459	Black	
600ml Sausage	10008654	White	
			_

#### TOOL BOX INVISIBLE **MS ADHESIVE & SEALANT**

Tool Box Invisible is an MS based crystal clear adhesive/sealant. It exhibits high bond strength and is ideal where a clear waterproof bond is required. Tool Box Invisible is isocyanate and solvent free, easy to tool and skins in 10-20 minutes.

TOOL BOX
INVISIBLE Geer Adhesive & Bealer TRANSPARENT
Highly flexible salaf Interior / Exterior High bond strength Invisible glass to glass bonding 200
GETS THE JOB DONE

H.B. Fuller

Format	Product Code	Colour
290ml Cartridge	15019572	Clear

#### **TOOL BOX HIGH TACK MS ADHESIVE & SEALANT**

Tool Box High Tack is a high modulus, elastomeric hybrid polymer adhesive/sealant with superior instant grab strength. Its high aggressive tack makes it ideal for bonding heavy objects and eliminates the need for mechanical fixing, bracing or propping during the curing process.

🗧 H.B. Fuller	
TOOL	
DOV	
MAL	

Format	Product Code	Colour
290ml Cartridge	15019992	White

#### FULAFLEX 570FC FAST CURE POLYURE-**THANE ADHESIVE & SEALANT**

FulaFlex 570FC is a one-component moisturecuring fast-cure polyurethane adhesive/sealant developed for application to concrete, masonry and many construction related substrates.

		Peuble & elastic construction bonding and sealing
Package	Product Code	Colour
310ml Cartridge	15020030	Black
310ml Cartridge	15019570	Grey
310ml Cartridge	15019576	White
600ml Sausage	15019571	Grey

## MAXBOND FAST GRIP **CONSTRUCTION ADHESIVE**

MaxBond Fast Grip is a water based, premium grade, multi purpose construction adhesive that is easy to use and provides a strong initial grab. MaxBond Fast Grip reduces squeaks in the flooring system and cures to give high bond strength. MaxBond Fast Grip is ideal for bonding parquetry to floors and subfloors, and for bonding timber strip flooring that will be sanded and finished after installation.



H.B. Fuller

Format	Product Code	Colour
420g Cartridge	15019172	Pale Brown
600mL Sausage	15019030	Pale Brown
1.5kg Concorde	15019214	White

#### MAXBOND ORIGINAL CONSTRUCTION ADHESIVE

MaxBond Original Construction Adhesive is a synthetic, rubber based adhesive designed primarily for the installation of flooring and MaxBond Construction Adhesive is a bonding most common construction ma as metal, timber and concrete.

wall panels. Ilso ideal for aterials such	
Code	Colour
097	Tan
198	Tan

Format	Product Code	Colour
320g Cartridge	15019097	Tan
900g Cartridge	15019098	Tan
600mL Sausage	15019099	Tan
Bucket 20x320g Ctgs	15019031	Tan

# MAXBOND PANEL GRIP CONSTRUCTION ADHESIVE

MaxBond Panel Grip Adhesive is a high strength, fast grab, neoprene rubber-based construction adhesive with exceptional wet grab strength, as well as exhibiting high initial bond strength when used in contact bonding method.



Format	Product Code	Colour
280g Cartridge	15019582	Pale Yellow

### **FULAFLEX 650FC FAST CURE** HYBRID POLYMER SEALANT

H.B. Fuller

ភា

Fulaflex 650FC is a high performance, solvent free, moisture curing hybrid polymer construction and industrial adhesive/sealant that provides a nonhazardous alternative to traditional PU adhesive/ sealants.

		Prestoutico
Package	Product Code	Colour
420g Cartridge	15020106	Grey
420g Cartridge	15020111	White
600ml Sausage	15020185	Grey
600ml Sausage	15020186	White

H.B. Fuller

H.B. Fuller

# **XTREME HIGH TACK**

Xtreme® High Tack is a high performance professional adhesive based on MSP (Modified-Silyl Polymer) technology.

- High mechanical resistance, end strength and E-modulus

- No shrinkage and bubble free

- Resistant to moisture, weather and UV - Permanently flexible, neutral curing and almost odourless

- Free of isocyanates, phthalates, solvents and silicones

- Will not slump in vertical applications

**Product codes** 

290ml cartridge - 30610679









**XTREME CLEARFIX** 

Bostik Xtreme® ClearFix is a high performance, flexible sealant and high strength adhesive in one for interior use. It cures to form a permanent flexible seal and tough bond, even under water, and does not require any primer to adhere to sound, dust-free, degreased surfaces.

- For use where a completely clear seal is desired

- Water potable - Tested in accordance with AS/NZS 4020

- No shrinkage and bubble free

- Free of isocyanates, phthalates, solvents and silicones

- Will not slump in vertical applications

#### Product codes

290ml cartridge Crystal Clear - 30610665



BOSTIK

### **XTREME FLEX**

Bostik Xtreme® Flex is a high performance, universal sealant and adhesive based on MSP (Modified Silyl-Polymer) technology. Xtreme Flex cures with the aid of atmospheric humidity to form a durable elastic rubber.

- Universal sealant and adhesive
- Interior and exterior use
- UV resistant
- Paintable
- Water potable (Water Potable to AS4020)
- Moisture and mould resistant
- Will not slump in vertical applications

#### Product codes

290ml cartridge White - 30610668 Grey - 30610797 Black - 30610681



Bostik

M

ASTI

**FIFX** 

290mL



ARALDITE 5 MINUTE epoxy adhesive is a clear, fast setting, two part epoxy which provides a rigid durable bond to a wide range of surfaces.

- Available in 14mL, 35mL and 200mL

ARALDITE 90 SECONDS EPOXY adhesive is a 90 second setting, two part epoxy adhesive which enables a durable bond to a variety of surfaces without lengthy clamp times.

- Available in 14mL and 24mL

ARALDITE ULTRA CLEAR epoxy adhesive is a crystal clear adhesive which leaves an invisible bond line. It has excellent bond strength to a wide range of surfaces.

- Available in 8mL and 24mL

#### ARALDITE SUPER STRENGTH EPOXY

adhesive is a super strong two part epoxy that has excellent adhesion to a broad range of surfaces and can hold up to 150kg\*

- Available in 35mL and 200mL







- Fast grab reducing the need for initial support
- Stays elastic after curing and very sustainable
- Bonds to wet surface
- UV resistant

#### **T-REX POWER TURBO** 132601 - 125mL

- Very fast build-up of strength

- Permanently elastic after curing

- Good adhesion to most common

substrates, even on slightly moist surfaces

- Hand tight in 20 mins

- Fully set in 3 hours

128371 - 290mL

SOUDAL

# 400 kg/m<sup>2</sup> - Fast curing

- sustainable
- High bond strength
- Isocyanate free

#### **T-REX POWER CRYSTAL** 121969 - 290mL

- Permanently elastic
- Invisible sealing and bonding
- Water potable - Excellent adhesion on nearly

all surfaces, even if slightly moist surfaces

- Suitable for sanitary applications
- Internal & external

# **T-REX POWER XTREME**

#### 154560 - 290mL - White (Equivalent to FIX ALL X-Treme Power Xpress) 134842 - 290mL - Black

- Extreme high initial tack of min.
- Stays elastic after curing and very
- Paintable

#### **STRONG AS NAILS - FIX IT** 144898 - 350gr

144904 - 20 x 350gr (Grab & Go Pack) - Multi-purpose

- High performance
- High bond strength
- Excellent adhesion to most building materials



#### **STRONG AS NAILS - MEGA GRAB** 144900 - 350gr

- Super initial grab up to 300 kg/m<sup>2</sup>
- Very good adhesion on all usual porous building surfaces
- High bond strength
- Cartridges made from recycled materials
- Waterproof packaging
- Very low VOC, meets GBCA requirements



130243 - 600mL

132261 - 16kg (bulk fill)

SOUDAL



- Ready to use, no mixing required
- Remains permanently elastic
- Walk on after 8 hours, sand after 24 hours - Coverage of 600mL = 1m<sup>2</sup>, 16kg = 16m<sup>2</sup>, 18kg = 18 - 20m<sup>2</sup>



#### SMX-30 PLUS ADHESIVE 120625 - 600mL



- Rapid cure and build up of final bond strength
- Walk on after 8 hours, sand after 12 hours
- Easy to apply, no mixing required
- Remains permanently elastic
- Coverage of 600mL = 1m<sup>2</sup>, 18kg = 18 20m<sup>2</sup>

#### LVT PREMIUM ADHESIVE 134895 - 13kg

SOUDAL



- High initial tack and very high final strength
- Easy to tool, even under difficult circumstances.
- Long open time and short evaporation time
- Immediately walkable
- Complies to EN14259: Adhesives for floorings
- Coverage of 12m<sup>2</sup> @ 1mm thick and 4m<sup>2</sup> @ 3mm thick



SOUDAL

SOUDAL



SOUDAL

120626 - 18kg (3 x 6kg foil bag)



# LIQUID NAILS

Timberflex Flooring Adhesive is a flexible, trowel grade adhesive suitable for most types of solid, engineered strip and sheet timber flooring to concrete and timber. The Advanced Polymer Technology formulation contains no isocyanate.

- Remains flexible
- Superior coverage 20m²/10L pail
- Low VOC to meet Green Building
- Council requirements - Excellent ridge formation
- Good wet grab
- Isocyanate and solvent free
- isocyaliate and solvent liee

100066     TIMBERFLEX 10L       100067     TIMBERFLEX 600ML
100067 TIMBERFLEX 600ML
9300697113788 LIQUID NAILS DIRECT STICK V-NOTCH TROWEL

#### **VBS RAPID**

Epoxy water based vapour barrier system for sealing concrete slabs.

- Rapid drying. Allows same day installation of flooring
- Waterbased
- Easy clean up with water
- One coat system
- High coverage, up to 40m<sup>2</sup> coverage
- Available in 5L
  - MATERIAL

DESCRIPTION

102802

VAPOUR BARRIER SYSTEM WATER BASED



SELLEYS

TIMBERFLEX

IMBERFLEX

TIM

### LIQUID NAILS DIRECT STICK

A high modulus, or semi-rigid polyurethane technology is ideal for strip and parquet flooring. Once cured, floors are held firmly in place preventing cupping and rafting, and reduced hollow spots and drumminess.

- High bond strength
- Rapid cure, low slump
- Foaming paste to fill gaps in between concrete and timber to reduce hollow spots
- Semi-rigid technology to reduce rafting and cupping
- Gel-like consistency is easy to spread with a strip flooring or parquetry trowel
- Meets Total VOC limits required by Green Building Coundil of Australia

	MATERIAL	DESCRIPTION	34
93	80069711468601	LIQUID NAILS DIRECT STICK 700G SAUSAGE	-1
9:	30069711367201	LIQUID NAILS DIRECT STICK 14KG	



SFLLEYS

### LIQUID NAILS VBS

A highly cross-linked, two-pack epoxy moisture vapour barrier system.

- Normally a one-coat system
- Colour coded components to aid proper mixing
- Controlled opacity: The dark green-pigmented colour of the mixed
- product helps the applicator to gauge a consistent application rate by eye Rapid cure
- Very low water vapour transmission rate

# MATERIAL

DESCRIPTION


930069711464801

LIQUID NAILS (VBS) 2 PART EPOXY KIT





#### LIQUID NAILS ORIGINAL



- Strong bond which is flexible enough to respond to movement
- allowing a strong bond to maintained.
- Adheres well to wet and dry timber
- Easily extruded and easy to use at low temperatures.
- Doesn't drip, sag or string, so there is less mess when you are using the product. - Bridges gaps on rough and ill fitting construction materials
- Meets AS 2329-1999
- Available in 320g and 680g

#### Liquid Nails Fast Grab

- A high strength water-based construction adhesive that provides strong initial holding power.
- Available in 420g

# LIQUID NAILS RAPID CURE

An advanced, high performance polyurethane construction adhesive that cures in just 10 minutes\*. It provides the ultimate strength in the Liquid Nails range.

- Fast cure in 10 minutes\*
- More than twice the strength of conventional
- construction adhesives. - Waterproof
- Exceeds the requirements
- of BS- EN204 D4 for durability
- Foams during curing to fill gaps
- Available in 325g

\*Expect longer times for very 'dry' timber, heavier objects and less porous surfaces, or in colder weather. Spraying surfaces with a very light mist of water may help to speed up cure.

#### **CROC A TACK - INSTANT GRAB**

- High quality professional adhesive
- Extremely high initial tack.
- Moisture curing
- Durable elastic
- Super high green strength.

300ml 53CROCB Black 53CROCG Grev	ZE	CODE	COLOUR
53CROCG Grev	)0ml	53CROCB	Black
		53CROCG	Grey
53CROCW White		53CROCW	White

#### **NEVER NAIL - MF20 CONSTRUCTION** ADHESIVE

A one component construction adhesive formulated to bond to a variety of common construction materials.

SIZE	CODE	COLOUR
300ml	53TNN	Cream





#### RTV'S 50ML XS BLUE

F.A.T. P.I.G. EDITION 4

Epoxies offer convenient solutions for a wide range of bonding applications. Our adhesives are versatile and easy-to-use. From general purpose to material specific epoxy, offers a formulation that will work in any environment.



ULTRA LOC

ULTRA LOU

**XS BLUE** 

PREMIUM

SIL ICONE



### LIQUID NAILS INSTANT HOLD

A high performance advanced polymer construction adhesive that delivers an instant hold up to 400kg per m2 on any building material, even vertical surfaces\*.

- Instantly holds up to 400kg per m<sup>2</sup>,
- No fasteners or clamps needed for
- many applications\* - Suitable for interior and exterior
- UV, heat and water resistant
- Adheres to wet and damp surfaces
- and can be applied on wet surfaces^ - Available in 290mL

\*Holds instantly but must not be disturbed until fully cured. Weight is restricted for non-porous substrates including, for example, metal & glass - support may be required where the object exceeds 5kg.

#### **CROC A TACK - CRYSTAL CLEAR**

- High quality professional adhesive
- Extremely high initial tack.
- Moisture curing
- Durable elastic - Super high green strength.
- SIZE COLOUR 300ml 53CROCC Crystal Clear





SELLEY





SELLEYS



**MACSIM**<sup>®</sup>

SELLEYS'

# **ULTRASET 2 IN 1**

- 2 in 1: adhesive and moisture control
- Extremely low moisture vapour permeability
- Superior bond strength
- Anti-fracture performance; can bridge cracks up to 3mm
- Zero VOC content (as calculated per SCAQMD Rule 1168)
- No restriction on board length or width

#### Product codes

26kg pail - 30608841



### **ULTRASET SF**

- Recommended adhesive by major timber manufacturers
- Meets requirements for EN 14293:2006 "Adhesives for bonding parquet to subfloor"
- Solvent free formulation
- Zero VOC
- Non flammable
- No mixing; ready to use
- Easy to spread

#### **Product codes**

16kg Pail (12.3L) - 30604590 600mL Sausage - 30840110 300mL Cartridge - 30840208



# **ULTRASET 3 IN 1**

BOSTIK

BOSTIK

- 3 in 1 adhesive, moisture control and sound reduction membrane
- Thickness Control<sup>™</sup> Spacer Technology maintains the adhesive thickness between hardwood flooring and substrate
- Extremely low moisture vapour permeability
- Superior sound control typically outperforms 3mm rubber underlay

#### **Product codes**

26kg pail - 30615274



### **ULTRASET HP**

- Meets requirements for EN 14293:2006 "Adhesives for bonding parquet to subfloor"
- Non-hazardous, solvent and isocyanate free formulation
- Very low VOC
  - Non flammable
  - No mixing; ready to use

#### Product codes

16kg Pail (10L) - 30840416 600mL Sausage - 30840417



#### FLOOR BOND XMS TIMBER FLOORING ADHESIVE

Floor Bond XMS is a high strength, high performance, MS polymer flooring adhesive. Ready to use with no mixing required, extremely smooth and easy to trowel. As Floor Bond XMS contains no water or solvents, the risk of deforming timber flooring is eliminated.



H.B. Fuller

Format	Product Code	Colour
960g Sausage	15019412	Brown
16kg Pail	15019410	Brown
470g Cartridge	15019411	Brown

#### **T-REX FLOOR & WALL ADHESIVE** 134899 - 4kg

SOUDAL

BOSTIK





- Outstanding bond strength on nearly all surfaces
- High performance mechanical properties
- Flexible elastic rubber movement accommodation up to ±20%
- Applicable for both horizontal and vertical applications - Straightforward application even in adverse conditions
- Easy to trowel



