

WELDCON PLATINUM GL-11 GASLESS WIRE 0.9MM 4.5KG 2-098FM



- Ultra-smooth arc with minimal spatter
- Suitable for all-positional, single & multi-pass welds
- Foil sealed for exceptional storage life
- Ideal for welding mild & galvanised steels



PLATINUM SERIES OXY/ACETYLENE KIT 4-OXACK



- Heavy duty Platinum series oxygen/acetylene cutting, welding and brazing kits
- 12 month warranty on regulators, blowpipe handle and cutting attachment
- Bonus combination circle/roller guide
- Robust stainless steel tool box with plenty of space



PROMAX 25 MIG TORCH (BINZEL 25 STYLE) WC-03615 - 4m



- European style and design
- Designed for reliability, easy maintenance and reduced down-time
- Advanced handle design: Ergonomic & lightweight
- Screwless quick-change handle & trigger = Change trigger and handle parts without tools
- Knuckle joint at handle for improved maneuverability
- High quality cables for maximum flexibility, heat and abrasion resistance APPLICATION INFO:
- 230 Amp maximum capacity (200A @ 60% duty cycle, using mixed argon gas)
- Heavy duty torch suitable for production welding
- Euro connection - fits most common brands/models of MIG welders / wire feeders



PLATINUM 12V ELECTRODES (GENERAL PURPOSE)



- Excellent Operator Appeal: Very smooth & stable arc, easy striking, low spatter, self-detaching / easy-to-remove slag
- User Friendly: Tolerant to dirty / rusty steel & poor fit up
- All-Positional: Fast-freezing slag for fillet & butt welding in all positions, including vertical down
- Ideal General Purpose electrode for fabrication, repair, fencing, light structural & more
- Unbeatable Performance on: Mild, galvanized, plate, sheet & tubular/RHS steel
- AWS specification A5.1 E6013 / AS/NZS Specification 1553.1 E4112-0



- Ultra smooth arc
- Easy striking
- All-positional, including vertical-down



| Material Number | Description |
|-----------------|-------------|
| 2-E12V/26 | 2.6mm 2.5kg |
| 2-E12V/32 | 3.2mm 5kg |

ARGON TWIN-GAUGE REGULATOR (MIG/TIG) 4-AR1




- Heavy duty Platinum series
- Solid brass body and bonnet
- 12 month warranty
- Spare parts available
- User friendly colour coded gauges
- For MIG or TIG use 0-28 L/min flow rate



S SERIES HOSE REELS

- Quality impact resistant UV stabilised covers for maximum durability
- Detachable steel mounting bracket enables 180° hose reel rotation
- Automatic & positive latching mechanism
- Adjustable hose stop for convenient lead length positioning

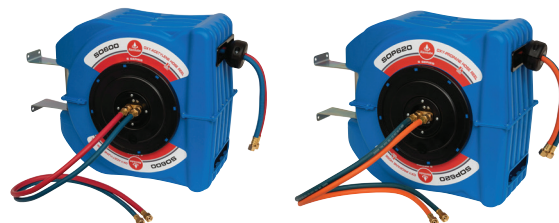

| Product No. | Product Description | Hose Length | Hose ID | Working Pressure | Hose Material | Cover Colour | Hose Colour | Max. Working Temp. | Reel Inlet BSPT(m) | Hose Outlet BSPT(m) | Weight |
|-------------|-------------------------|-------------|---------|------------------|---------------|--------------|-------------|--------------------|--------------------|---------------------|--------|
| S0600 | Oxy-Acetylene Hose Reel | 15m | 6mm | 300psi (20bar) | Rubber | Blue | RED/BLUE | -30°C~60°C | 5/8" | 5/8" | 10kg |
| S0P620 | Oxy-Propane Hose Reel | 15m | 6mm | 300psi (20bar) | Rubber | Blue | RED/BLUE | -30°C~60°C | 5/8" | 5/8" | 10kg |