

**WELDCON PLATINUM GL-11 GASLESS WIRE 0.9MM 4.5KG 2-098FM**



- Ultra-smooth arc with minimal spatter
- Suitable for all-positional, single & multi-pass welds
- Foil sealed for exceptional storage life
- Ideal for welding mild & galvanised steels



**PLATINUM SERIES OXY/ACETYLENE KIT 4-OXACK**



- Heavy duty Platinum series oxygen/acetylene cutting, welding and brazing kits
- 12 month warranty on regulators, blowpipe handle and cutting attachment
- Bonus combination circle/roller guide
- Robust stainless steel tool box with plenty of space



**PROMAX 25 MIG TORCH (BINZEL 25 STYLE) WC-03615 - 4m**



- European style and design
- Designed for reliability, easy maintenance and reduced down-time
- Advanced handle design: Ergonomic & lightweight
- Screwless quick-change handle & trigger = Change trigger and handle parts without tools
- Knuckle joint at handle for improved maneuverability
- High quality cables for maximum flexibility, heat and abrasion resistance APPLICATION INFO:
- 230 Amp maximum capacity (200A @ 60% duty cycle, using mixed argon gas)
- Heavy duty torch suitable for production welding
- Euro connection - fits most common brands/models of MIG welders / wire feeders



**PLATINUM 12V ELECTRODES (GENERAL PURPOSE)**



- Excellent Operator Appeal: Very smooth & stable arc, easy striking, low spatter, self-detaching / easy-to-remove slag
- User Friendly: Tolerant to dirty / rusty steel & poor fit up
- All-Positional: Fast-freezing slag for fillet & butt welding in all positions, including vertical down
- Ideal General Purpose electrode for fabrication, repair, fencing, light structural & more
- Unbeatable Performance on: Mild, galvanized, plate, sheet & tubular/RHS steel
- AWS specification A5.1 E6013 / AS/NZS Specification 1553.1 E4112-0



- Ultra smooth arc
- Easy striking
- All-positional, including vertical-down



Material Number	Description
2-E12V/26	2.6mm 2.5kg
2-E12V/32	3.2mm 5kg

**ARGON TWIN-GAUGE REGULATOR (MIG/TIG) 4-AR1**




- Heavy duty Platinum series
- Solid brass body and bonnet
- 12 month warranty
- Spare parts available
- User friendly colour coded gauges
- For MIG or TIG use 0-28 L/min flow rate



**S SERIES HOSE REELS**

- Quality impact resistant UV stabilised covers for maximum durability
- Detachable steel mounting bracket enables 180° hose reel rotation
- Automatic & positive latching mechanism
- Adjustable hose stop for convenient lead length positioning

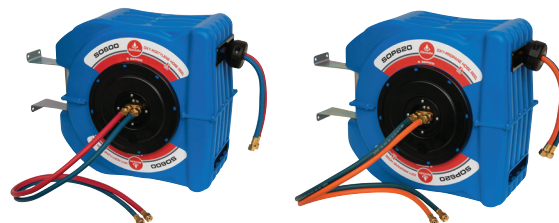

Product No.	Product Description	Hose Length	Hose ID	Working Pressure	Hose Material	Cover Colour	Hose Colour	Max. Working Temp.	Reel Inlet BSPT(m)	Hose Outlet BSPT(m)	Weight
S0600	Oxy-Acetylene Hose Reel	15m	6mm	300psi (20bar)	Rubber	Blue	RED/BLUE	-30°C~60°C	5/8"	5/8"	10kg
S0P620	Oxy-Propane Hose Reel	15m	6mm	300psi (20bar)	Rubber	Blue	RED/BLUE	-30°C~60°C	5/8"	5/8"	10kg